



Flush-mounting auxiliary touch module with one command.

Two touch areas on the front, this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, TOUCH and EVO commands, or as a wired command for a connected 2-channel ZigBee interface.

The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol.

Tanım	Auxiliary touch 1-command module	Besleme ünitesi	100 ÷ 240 V ac - 50/60 Hz
Modül sayısı	1	Giriş kanalı sayısı	-
Yerel kontrol	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Auxiliary input channel voltage	-
Depolama sıcaklığı	-25 ÷ +70 °C	Çıkış kanalı kanallar	1
Kullanım sıcaklığı	-5 ÷ +45 °C	Çıkış kontakları	-
Bağıl nem (yoğuşmasız)	Maks %93	240 V ac Incandescent-halogen lamps	-
Front light signaling	Mavi led	240 V ac LED lamps	-
Kablolama terminalleri	Vidalı	Loads piloted from electronic transf. 240 V ac	-
Terminal sıkıştırma kapasitesi esnek kablolar (mm <sup>2</sup> )	Maks. 1,5	240 V Floresan lambalar	-
Terminal sıkıştırma kapasitesi sert kablolar (mm <sup>2</sup> )	Maks. 1,5	Yükleme kontrolü	-
Bağlam	Dry indoor places	Acoustic signalling element	Buzzer
IP derecesi	IP20 (with plate fitted)	Standart	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000

### DIMENSIONAL

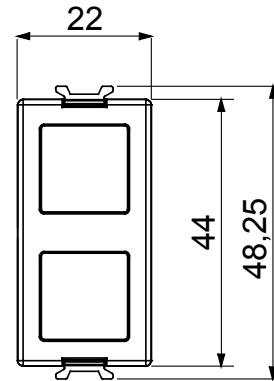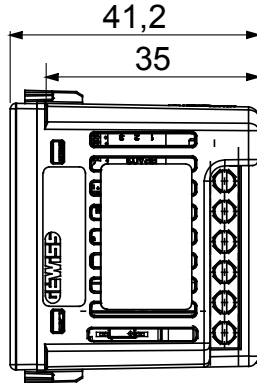

### TECHNICAL SYMBOLOGY

#### IP

IP20 (with plate fitted)

### STANDARDS/APPROVALS

