




Wall-mounting thermostat to control heating/cooling and humidification/dehumidification systems on the BUS and manage the temperature in manual mode or on 3 levels (comfort, pre-comfort, economy). Control algorithms for 2- or 4-way systems: two points (ON/OFF or 0%-100%), proportional-integral (PWM or continuous adjustment), fan coil (max. 3 speeds or with continuous adjustment 0%-100%). Includes 1 input for external NTC temperature sensor (for room temperature measurement compensation or for underfloor heating protection).

Equipped with a user interface with touch commands (capacitive) on technopolymer plate and backlit display. The thermostat has built-in proximity, temperature and humidity sensors. The device supports KNX Secure. To be configured with ETS software. The thermostat can be combined with KNX flush-mounting timed thermostats or Smart Gateway for local temperature adjustment: in this case, the thermostat acts as a slave by executing the temperature sent by the master. Available a "hotel" operating mode with simplified functionalities and user interface for hotel applications.

Equipped with front plate and with coupling terminal for connection to bus. Wall fixing with wall plugs or screw fixing on rectangular 3 modules boxes (centre distance 83.5 mm). Plate material: technopolymer.

Kategori	Thermo ICE KNX wall mounting thermostat	iletişim	KNX Secure
Renk	Doğal bej	Material	Front plate in technopolymer
Montaj	Duvar montajı	Besleme ünitesi	110-230V ac - 50/60Hz
Current absorbed by power supply	< 3 W (in stand-by < 1 W)	Arayüzler	KNX TP1
Current absorbed by KNX bus (mA)	10	Ölçülmüş boyutlar	Temperature, humidity, one additional input for external NTC temperature sensor
Giriş kanalı sayısı	1 for external NTC sensor (type: NTC 10K, es. GW 10 800)	Giriş voltajı	-
Kablolama terminalleri	Vidalı	Terminal sıkıştırma kapasitesi esnek kablolar (mm ²)	Max 1,5 mm ²
Terminal sıkıştırma kapasitesi sert kablolar (mm ²)	Max 1,5 mm ²	Kullanım sıcaklığı	-5 ÷ +45 °C
Bağıl nem (yoğuşmasız)	Maks %93	Depolama sıcaklığı	-25 ÷ +70 °C
Connection to the KNX bus	KNX bus terminal	Boyutlar LxHxD (mm)	123,2x95,2x20,6
IP derecesi	IP20	Standart	Low Voltage Directive 2014/35/EU (LVD) Electromagnetic Compatibility Directive 2014/30/EU (EMC) Directive RoHS 2011/65/EU Directive ERP 2009/125/EU EN 60730-1, EN 60730-2-9

DIMENSIONAL

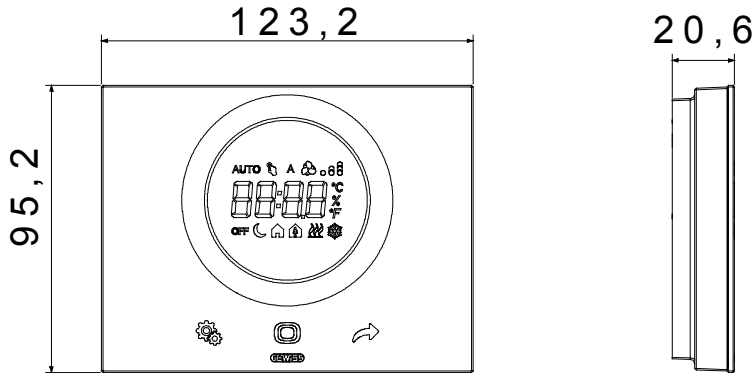

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

