




PA66'da yapılan kablo bağları, Halojensiz. 2,4x75'ten 9x914 mm'ye kadar 13 boyutta mevcuttur. Seriyi tamamlamak için şunlar da mevcuttur: ağır hizmet tipi kablo bağları, yeniden açılabilir kablo bağları, halkalı kablo bağları ve plakalı kablo bağları.

Renk	Siyah	Boyutlar LxH (mm)	2.5x96
Malzeme	Poliamit 66 karbonatlı	Çekme gerilimi (daN)	8
Terminal tutma kapasitesi	2-19 mm	Akkor Tel Deneyi:	650 °C
Tip	Ağır iş	Malzeme tipi	EN 60754-2 uyarınca halojen Free dir
Elektrokod	3640	Standart	EN 62775
Dumandan aşınma	< 5%	Aleve karşı dayanıklılık UL 94 ile uyumlu	V2
Oksijen limiti endeksi	29%	Kurulum sıcaklığı	-5 +60 °C
Hizmet sıcaklığı aralığı	-40 °C +80 °C (maks. 135 °C)		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Limited resistance	Limited resistance	Limited resistance	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

DIMENSIONAL

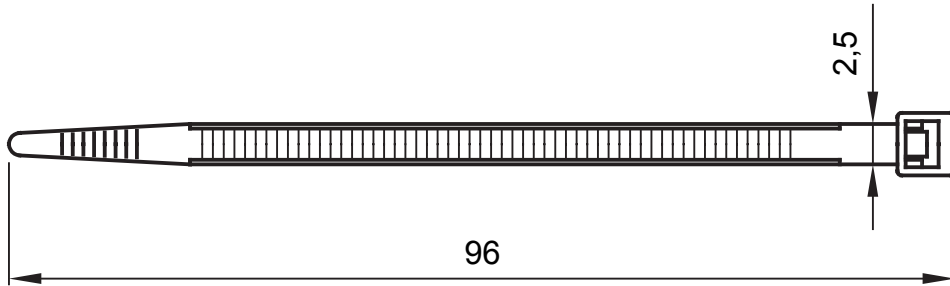

TECHNICAL SYMBOLOGY

GWT

650 °C

HF
HALOGEN FREE

EN 60754-2 uyarınca
halojen Free dir

INSTALLATION
-5 °C min
+80 °C max

-5 +60 °C

STANDARDS/APPROVALS



GEWISS S.p.A. Via Domenico Bosatelli 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 26/07/2026

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice