

Description Automatic reclosing device

Code ReStart Rd 2P

Coupled with GWD4817

Rated voltage AC 230 V

Rated current 25 A


No. modules 3

Standard EN 50557

Rated frequency (Hz) 50 - 60 Hz

| | | | |
|---|-----------------------|---|--------------|
| Distribution system | TT - TN-S | Rated non-operating resistance between live parts and earth (Rdo) | 8kΩ |
| Insulation voltage (Ui) | 500 V | Rated operating resistance between live parts and earth (Rd) | 16 kΩ |
| Rated impulse withstand voltage (Uimp) | 4 kV | Maximum operating frequency | 30 oper./h |
| Overvoltage category | III | Mechanical endurance | 4000 |
| Dielectric strength test voltage between pole and earth | 2500 Vac for 1 minute | Type of residual current protection | A |
| Rated residual operating current | 30 mA | Operating temperature | -5°C ÷ +40°C |
| Stocking temperature | -40°C ÷ +70°C | Automatic reclosure for untimely tripping | Yes |
| Earth failure test | Yes | Continuous system monitoring | No |
| Number of poles | 2P | Electrocod | 1414 |

DIMENSIONAL

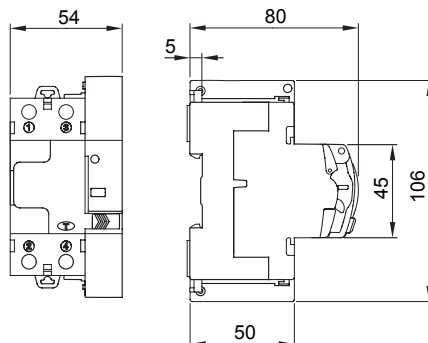

STANDARDS/APPROVALS

