




For walls	Brickwall	Glow Wire Test	650 °C
Houseable interloc. socket	1	IP degree	IP44
Mechanical resistance	IK08	Houseable IB socket-outlets	16/32 A
For socket-outlets	CBF horizontal	Electrocod	2220
Drilling bottom	Through multidiameter cutter	Minimum installation temperature	-15°C

DIMENSIONAL

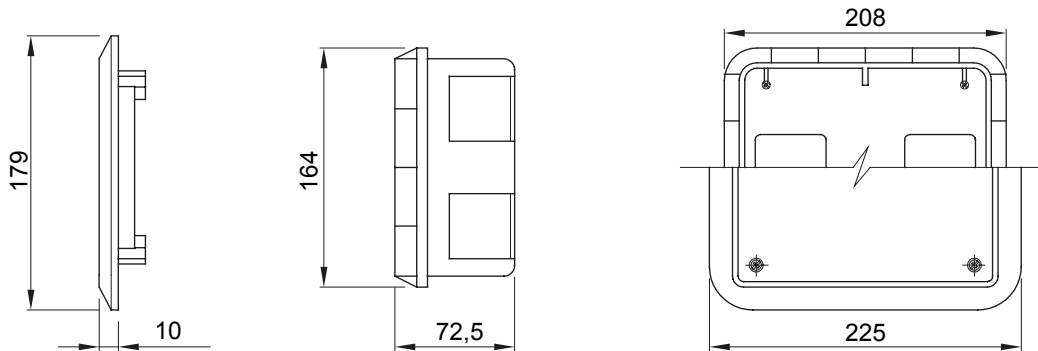

TECHNICAL SYMBOLOGY

GWT **IP** **IK**

650 °C

IP44

IK08

STANDARDS/APPROVALS

