




Pliable protective conduit system FKHF range, made of PP: classification 2322, available in seven diameters, from 16 to 63 mm, with or without cable puller. Suitable for electrical system and/or data transmission. Suitable for flush mounting installation in floors, walls and ceilings or buried in concrete. Certified Halogen Free in compliance with EN 60754-2 and Low Smoke in compliance with EN 61034-2. Suitable for applications inside false ceilings and floating floors and installations in public places: schools, cinemas, theatres, underground etc..

|                              |  |  |                               |
|------------------------------|--|--|-------------------------------|
| Colour                       | Grey RAL 7035  | Material   | PP self-extinguishing         |
| Type                         | with cable puller  | Conduits Ø (mm)  | 25                            |
| Type of material             | Halogen free in compliance with EN 60754-2 e Low smoke in compliance with EN 61034-2 | Resistance to compression                                    | 2 (Light - 320 N)             |
| Resistance to impact         | 3 (Medium - 2 J)   | Resistance to bending  | 2 (Pliable - self recovering) |
| Electrical characteristics   | 2 (With electrical insulating characteristics)                                       | Protection against ingress of water                          | 0                             |
| Resistance against corrosion | Not applicable to plastic conduit systems  | Fire resistance  | 1 (Non-flame propagating)     |
| Insulation resistance        | 100 MΩ a 500V for 1 minute   | Protection against ingress of solid objects with GF coupling | 4                             |
| Dielectric rigidity          | 2000 V a 50 Hz for 15 minutes  | Standard   | EN 61386-1 EN 61386-22        |

### DIMENSIONAL

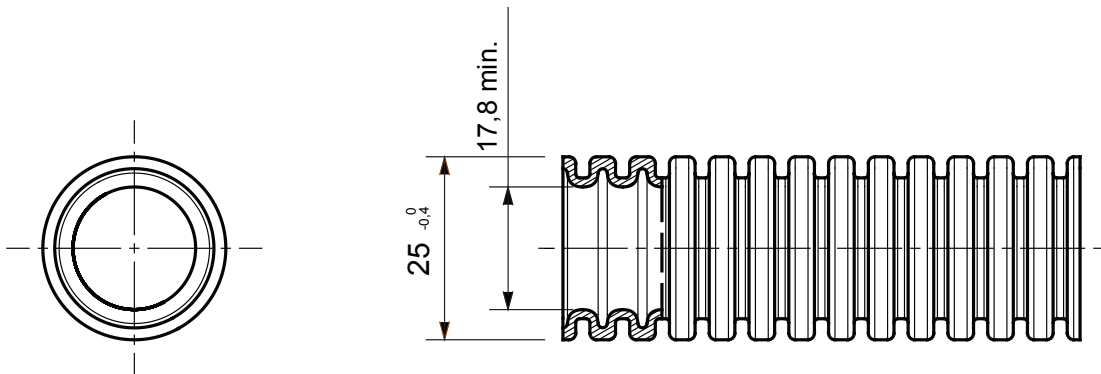

### TECHNICAL SYMBOLOGY



### STANDARDS/APPROVALS

