



SMART [PRO] 2.0 is a high power outdoor and indoor LED projector, suitable for lighting large areas and sports facilities.

It can be installed on the wall, ceiling or ground thanks to the polyester powder coated galvanised steel bracket with trivalent passivation, equipped with adjustable goniometric scale and supplied in a kit. The body is fabricated in aluminium die casting

EN AB 46100, with integrated passive heat sink, powder coated polyester with trivalent passivation. Metal core PCB with CSP LED.

Reflector made of metallic HT PC or anodised and polished aluminium. Hardened front glass with 4mm thickness, anti-ageing silicone seals and A2 stainless steel exterior screws. Plastic venting and anti-condensation device. Electrical connection via IP68 connector for 1.5mm<sup>2</sup> cables. Insulation class 1. Remote power

supply unit supplied separately. Available with nine different types of optics, three types of Colour Temperature (3,000/4,000K/5,700K) and three different types of Chromatic Yield Index (CRI>70, CRI>80, CRI>90).

Designed to withstand surges up to 5KV (RCCB mode) and 10KV (common mode), temperature variations from -30°C to +50°C, water and dust penetration up to IP66 degree of protection and impacts up to IK08 grade.

#### GENERAL INFORMATION

|                                  |   |
|----------------------------------|---|
| Context                          | Sport, Big Areas                                |
| Luminaire                        | LED luminaire with mid and high lumen power     |
| Application                      | Indoor / Outdoor                                |
| Unique digital code (Datamatrix) | Currently not present                           |
| Colour                           | Graphite grey                                   |
| Type of light source             | LED   |
| System power                     | 660 W   |
| LED Lifetime                     | L90B10(Tq25°C)=40.000h; L80B10 (Tq25°C)=90.000h |
| Weight (kg)                      | 15  |

|                       |                |
|-----------------------|----------------|
| Warranty              | 5 years        |
| Stocking temperature  | -              |
| Operating temperature | -30°C ÷ +50 °C |

#### MATERIALS

|             |  |
|-------------|--|
| Body        | Die-cast aluminium                             |
| Shield type | Flat tempered glass 4mm                        |
| Optic       | Polished quartz and metallized PC HT reflector |

|              |                         |
|--------------|-------------------------|
| Gasket       | Anti-aging silicone     |
| Locking Hook | Hexagonal metric screws |

|                |                 |
|----------------|-----------------|
| External screw | Stainless steel |
|----------------|-----------------|

|        |                         |
|--------|-------------------------|
| Colour | Polyester powder coated |
|--------|-------------------------|

#### STANDARDS AND APPROVALS

|   |           |
|---|-----------|
| Classification                          | -         |
| Device with reduced surface temperature | No        |
| DIN 18032-3 certification               | Available |
| IPEA                                    | -         |
| Insulation class                        | I         |
| IP degree                               | IP66      |
| Mechanical resistance                   | IK08      |
| Glow Wire Test                          | -         |

#### OPTIC AND ILLUMINATING FEATURES

|                                    |   |
|------------------------------------|---|
| Optic                              | C2 - Circular 25°                                     |
| Unified Glare Rating               | G*6 - ULOR = 0  |
| Lumen output (lm)                  | 74600   |
| Efficacy (lm/W)                    | 113   |
| Colour temperature                 | 3000 K  |
| Colour Rendering Index             | CRI>70  |
| Standard Deviation Colour Matching | SDCM = 3  |
| Photobiological Risk Class         | -   |
| Standard                           | EN60598-1; EN60598-2-5; IEC 62778; IEC 62471; EN13201 |


#### ELETRICAL AND LIGHTING FEATURES

|                        |                          |
|------------------------|--------------------------|
| Supply voltage         | -                        |
| Rated frequency (Hz)   | -                        |
| Driver                 | To be ordered separately |
| Driver failure rate    | See external supply unit |
| Overvoltage protection | See external supply unit |
| Control System         | See external supply unit |


#### INSTALLATION AND MAINTENANCE

|                                     |  |
|-------------------------------------|--|
| Mounting and installation           | High-mast lighting - Wall mounting - Ground mounting |
| Tilt                                | Rotation on bracket with integrated goniometer       |
| Wiring                              | Watertight connector                                 |
| Fixing                              | Bracket  |
| Light source replaceability         | By professional                                      |
| Controlgear replaceability          | -  |
| Driver Box                          | External   |
| Maximum surface exposed to the wind | 0,222 m <sup>2</sup>                                 |

## DIMENSIONAL

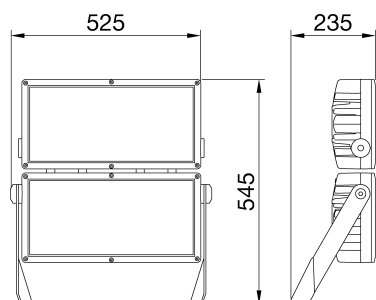

## PHOTOMETRIC DISTRIBUTION





## Product Data Sheet

### GWP2473LS

SMART [PRO] 2.0

#### TECHNICAL SYMBOLOGY



  
0,222 m2



**IP**  
IP66

**IK**  
IK08

**GWT**  
-

#### STANDARDS/APPROVALS

**UK  
CA**

