




The System modular devices allow the creation of infinite combinations of devices and plates, through a complete range that covers all design, functional and installation needs. Colours and finishes: satin black, elegant and classy. Ideal for flush-mounted solutions (for rectangular or square boxes), surface-mounted solutions and special applications. The range includes control units, socket-outlets, breakers, indicators, connectors and devices for the control, safety and comfort of your home

| | | | |
|---|---------------------------------|-----------------------------|-------------------------------|
| Beschreibung | 2P+E - 16 A | Farbe | Schwarz |
| Spannung | 250 V ac | Schutzleiter-anschluss | Seitlich und zentral |
| Standard | Italienisch/Deutsch | Merkmale | Mit Schrauben |
| Für Steckstifte | Ø 4 / 4,8 / 5 mm | Typ | P40 |
| Norm | CEI 23-50 / IEC 60884-1 | Widerstand bei Prüfspannung | 2000 V bei 50 Hz für 1 Minute |
| Anzahl Betätigungen (Änderung Schaltstellung). | 10.000 bei In 250 V ac cosφ=0,8 | Kugeldruckprüfung | 125 °C |
| Glühdrahtprüfung | 850 °C | Haltekraft Klemme | > 50 N |
| Anschluss feindrätig (mm²) | min. 0,75 - max. 2x4 | Anschluss massiv (mm²) | min. 0,5 - max. 2x2,5 |
| Anz. SYSTEM Module | 2 | Material | Technopolymer |
| Electrocod | 0131 | | |

Abmessungen

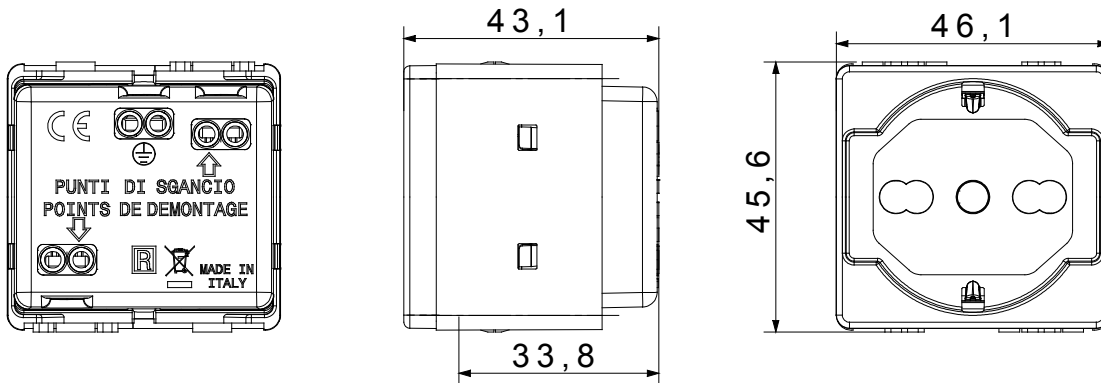

Technische Symbole



Normen / Richtlinien

