
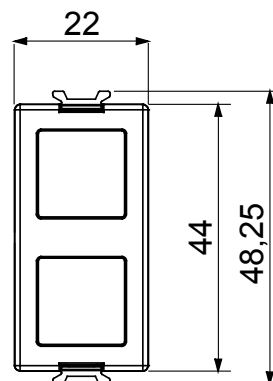


Flush-mounting touch dimmer module. Two touch areas on the front for switching the connected load ON and OFF (short press) or for regulating the brightness (long press).
The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol.
The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

| | | | |
|--|--|--|---------------------------|
| Description | Dimmer touch | Power supply | 100 ÷ 240 V ac - 50/60 Hz |
| No. modules | 1 | No. input channels | 2 |
| Local control | Via 2 frontal touch areas (must be completed with ICE Touch plate) | Auxiliary input channel voltage | 100 ÷ 240 V ac - 50/60 Hz |
| Stocking temperature | -25 ÷ +70 °C | No. output channels | 1 |
| Working temperature | -5 ÷ +45 °C | Relative humidity (non-condensative) | Max 93% |
| 240 V ac Incandescent-halogen lamps | 4 ÷ 150 W | Front light signaling | Blue led |
| 240 V ac LED lamps | 4-150W (max 10 lamps) | Wiring terminals | With screw |
| Loads piloted from electronic transf. 240 V ac | 4 ÷ 150 VA (240 V ac) | Terminal tightening capacity stranded cables (mm²) | Max. 1,5 |
| 240 V Fluorescent lamps | - | Terminal tightening capacity solid cables (mm²) | Max. 1,5 |
| Load control | Trailing edge | Context | Dry indoor places |
| Acoustic signalling element | Buzzer | IP degree | IP20 (with plate fitted) |
| Standard | 2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000 | | |

DIMENSIONAL

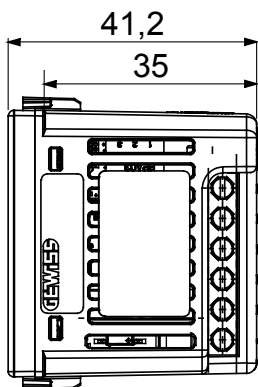

TECHNICAL SYMBOLOGY

IP

IP20 (with plate fitted)

STANDARDS/APPROVALS

