

## **Product Data Sheet**

## GW22463

27 COMBI Range




Watertight plates IP55 System range for rectangular (3 and 4 modules) flush mounting boxes. Watertight plates self-supporting for the installation of System range devices. Ergonomic membrane, opening facilitated by a comfortable handle. IP55 degree guaranteed with closed lid and watertight plate mounted on smooth and waterproof walls, without grooves.

Category	System series	Туре	Italian standard plates
Group	Watertight plates	Description	4 modules
Colour Plate	Grey RAL 7035	Finishing	Glossy
Material	Technopolymer	IP degree	IP55 (with closed lid)
Lid	With membrane	Membrane color	Transparent
For flush mounting box	Rectangular 4 modules	Fixing	2 screws (included)
Type of screw	6/32 x 18mm	Screw material	Galvanised steel
Included support	Self-supporting	Gasket	Vulcanized expanded rubber
Glow Wire Test	650 °C	Thermo-pressure with ball	70 °C
Standard	EN 60669-1	Operating temperature	-25 +60 °C
UV resistance	Yes (ISO 4892-2)	Maximum opening angle lid	100°
Electrocod	0110		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS												
Saline solution	Acids		Bases		Solvents			Mineral	UV			
	Concentrated	Diluited	Concentrated	Diluited	Hexane	Benzol	Acetone	Alcohol	oil	rays		
Resistant	Limited resistance	Resistant	Resistant	Resistant	Limited resistance	Not resistant	Not resistant	Not resistant	Limited resistance	Resistant		

## **DIMENSIONAL**

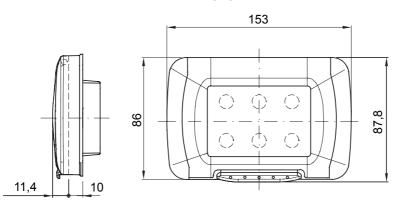

## **TECHNICAL SYMBOLOGY**









IP55 (with closed lid) 650 °C 70 °C STANDARDS/APPROVALS



