


Complete system for the connection and distribution of LAN networks in residential and tertiary sector environments.
The range includes fibre optic solutions, wall panels, floor cabinets and copper wiring products.
The Data Center series provides all the products necessary to create a multi-service fibre optic infrastructure for residential buildings, in full compliance with all the indications dictated by the new CEI Guidelines 306-2 and Law 164/14.

| Category | Optical connector | Cable colour | White |
|------------------------------|---------------------|---------------------------------------|-----------------------------------|
| No. optical fibers | 1 | Length | 10 m |
| Ø sheath | 2,6 mm | Ø pulling sheath | < 4 mm |
| For connectors | SC/APC - Fiber Fast | Classification | G.657.A2 / B6_a2 Bend Insensitive |
| Ø core | 9 µm | Ø cladding | 125 µm |
| Strength member | Kevlar | Outer jacket | LSZH |
| Cable | Loose - OS2 | CPR class | Cca-s1b,d1,a1 |
| Tension | 50 N | Minimum bend radius (Dynamic) | 20x cable diameter |
| Minimum bend radius (Static) | 10x cable diameter | Max attenuation (@1310 nm / @1550 nm) | 0.35 / 0.2 dB/Km |
| Working temperature | From -10°C to +60°C | | |

DIMENSIONAL

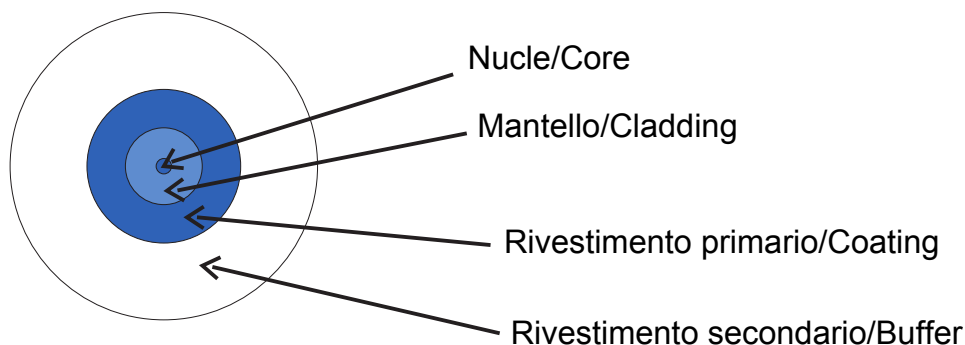

STANDARDS/APPROVALS

