
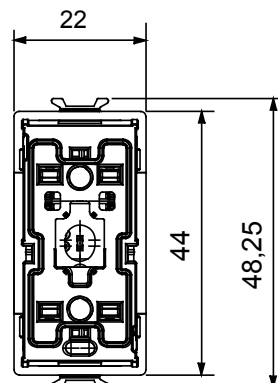


Flush-mounting axial auxiliary module with one command. An axial push-buttons on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The module with 1 auxiliary axial command can also be used to directly command small resistive or weakly inductive loads such as ringers and buzzers (max. 10VA);. The device must be completed with one of the front buttons key available.

| | | | |
|---|--|--|---------------------------|
| Description | 1-channel auxiliary axial command | Power supply | 100 ÷ 240 V ac - 50/60 Hz |
| No. modules | 1 | No. input channels | - |
| Local control | Via front push button (to complete with button key) | Auxiliary input channel voltage | - |
| Stocking temperature | -25 ÷ +70 °C | N. of LED input channels | 1 |
| Working temperature | -5 ÷ +45 °C | LED input channels voltage | 100 ÷ 240 V ac - 50/60 Hz |
| Relative humidity (non-condensative) | Max 93% | No. output channels | 1 |
| Front light signaling | Blue led | Output contacts | 1A (AC1) |
| Wiring terminals | With screw | 240 V ac Incandescent-halogen lamps | - |
| Terminal tightening capacity stranded cables (mm ²) | Max. 1,5 | 240 V ac LED lamps | - |
| Terminal tightening capacity solid cables (mm ²) | Max. 1,5 | Loads piloted from electronic transf. 240 V ac | - |
| Context | Dry indoor places | 240 V Fluorescent lamps | - |
| IP degree | IP20 (with button key) | Load control | - |
| Standard | 2014/35/EU (LVD), 2011/65/EU + 2015/863 (RoHS), EN 60669-1, EN IEC 63000 | | |

DIMENSIONAL

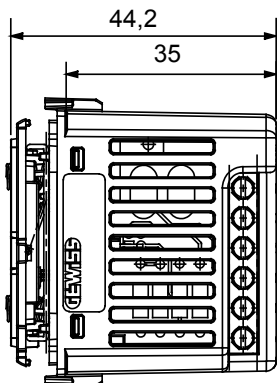

TECHNICAL SYMBOLOGY

IP

IP20 (with button key)

STANDARDS/APPROVALS

