




The System modular devices allow the creation of infinite combinations of devices and plates, through a complete range that covers all design, functional and installation needs. Colours and finishes: satin black, elegant and classy. Ideal for flush-mounted solutions (for rectangular or square boxes), surface-mounted solutions and special applications. The range includes control units, socket-outlets, breakers, indicators, connectors and devices for the control, safety and comfort of your home

Category	Socket-Outlet	Description	2P+E - 15A
Colour	Black	Voltage	250/125V AC
Earth pit	-	Standard	Euro-USA
Characteristics	-	For plug pins	Ø 4 mm/ flat
Wiring terminals	With screw	Standard	IEC 60884-1
Resistance at test voltage	2000 V at 50 Hz for 1 minute	Prolonged operation switch (no.of position changes)	10.000 at In 250 V ac cosφ=0,8
Thermo-pressure with ball	125 °C	Glow Wire Test	850 °C
Terminal grip on cable traction	> 50 N	Terminal tightening capacity	min. 0,75 - max. 2x4
		stranded cables (mm²)	
Terminal tightening capacity	min. 0,5 - max. 2x2,5	No. SYSTEM modules	1
solid cables (mm²)			
Material	Technopolymer	Electrocod	0131

#### DIMENSIONAL

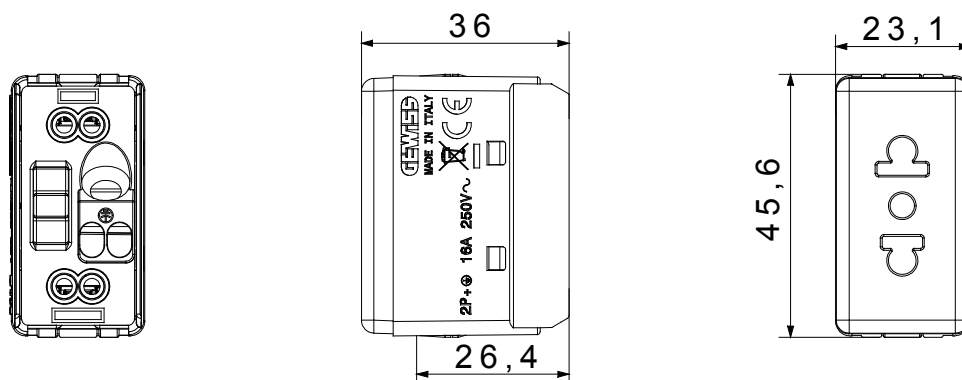

#### TECHNICAL SYMBOLOGY



#### STANDARDS/APPROVALS

