



Description Automatic reclosing device

Code ReStart Rd 2P

Suitable for IDP RCCBs - 2P up to 80 A - 30 mA

Rated voltage AC 230 V

Rated current 25 - 40 - 63 - 80 - 100 A


Rated current 0 A

No. modules 1

Standard EN 50557

Rated frequency (Hz)	50 - 60 Hz	Distribution system	TT - TN-S
Rated non-operating resistance between live parts and earth (Rdo)	8k Ω	Insulation voltage (Ui)	500 V
Rated operating resistance between live parts and earth (Rd)	16 k Ω	Rated impulse withstand voltage (Uimp)	4 kV
Maximum operating frequency	30 oper./h	Overvoltage category	III
Mechanical endurance	4000	Dielectric strength test voltage between pole and earth	2500 Vac for 1 minute
Type of residual current protection	AC - A - A[I _R] - F	Rated residual operating current	30 mA
Operating temperature	-5 +40 °C	Storing temperature	-40 +70 °C
Automatic reclosure for untimely tripping	Yes	Earth failure test	Yes
Continuous system monitoring	No	Number of poles	2P
Electrocod	1414		

DIMENSIONAL

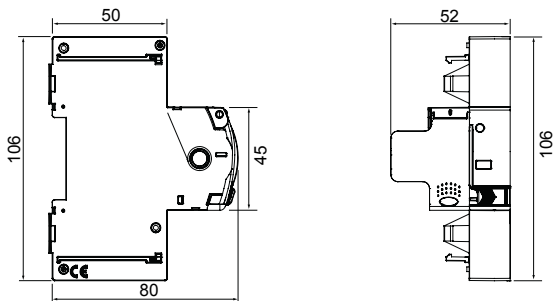

STANDARDS/APPROVALS

