


Top entries	2xØ 23	Glow Wire Test	650 °C
Houseable interloc. socket	1	IP degree	IP55
Mechanical resistance	IK08	Side entries	2xØ 23
Houseable IB socket-outlets	16/32 A	Electrocod	2221
Minimum installation temperature	-25°C		

### DIMENSIONAL

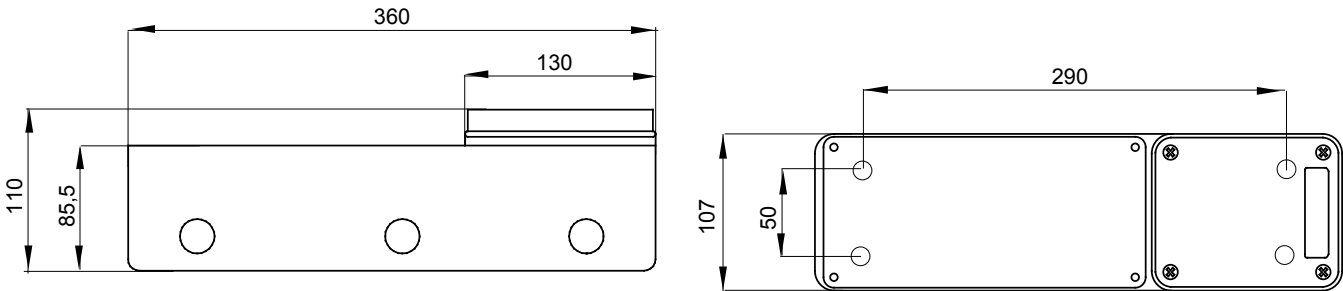

### TECHNICAL SYMBOLOGY

<b>GWT</b>	<b>IP</b>	<b>IK</b>
650 °C	IP55	IK08

### STANDARDS/APPROVALS

