


## Product Data Sheet GW76828

GW Connect range

|--|

Systems of accessories for electrical installations used for residential, tertiary and industrial applications. The system consists of fasteners for pipes and cables, cable fittings, accessories for rigid pipes (RK Series) and flexible conduit (DF Series). The system include also a wide variety of cable ties (52FS Range) and terminal blocks (44 Range).

| IP degree         | IP68 (at 3 bar) | Material              | Nickel-plated brass             |
|-------------------|-----------------|-----------------------|---------------------------------|
| For cables Ø (mm) | from 12 to 17   | Description           | Cable gland                     |
| Type of pitch     | PG21            | Operating temperature | -30 +100 °C                     |
| Electrocod        | 3651            | Standard              | EN 50262 - IEC62444 - DIN 40430 |

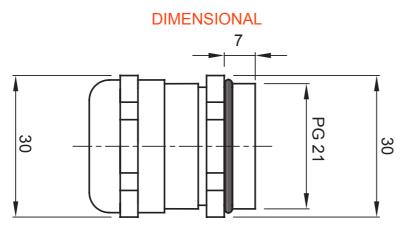

## **TECHNICAL SYMBOLOGY**



IP68 (at 3 bar)

STANDARDS/APPROVALS

CE

www.gewiss.com sat@gewiss.com Last update 28/04/2024