


Product Data Sheet GW76830

GW Connect range



Systems of accessories for electrical installations used for residential, tertiary and industrial applications. The system consists of fasteners for pipes and cables, cable fittings, accessories for rigid pipes (RK Series) and flexible conduit (DF Series). The system include also a wide variety of cable ties (52FS Range) and terminal blocks (44 Range).

IP degree	IP68 (at 3 bar)	Material	Nickel-plated brass
For cables Ø (mm)	from 20 to 26 / from 27 to 34	Description	Cable gland
Type of pitch	PG36	Operating temperature	-30 +100 °C
Electrocod	3651	Standard	EN 50262 - IEC62444 - DIN 40430

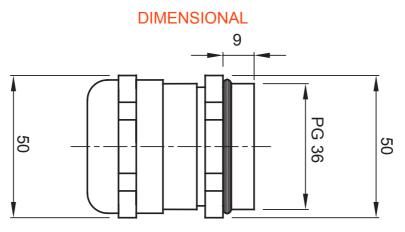

TECHNICAL SYMBOLOGY



IP68 (at 3 bar)

STANDARDS/APPROVALS

CE

www.gewiss.com sat@gewiss.com Last update 25/04/2024 Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice