


Product Data Sheet GW76896

GW Connect range

|--|

Systems of accessories for electrical installations used for residential, tertiary and industrial applications. The system consists of fasteners for pipes and cables, cable fittings, accessories for rigid pipes (RK Series) and flexible conduit (DF Series). The system include also a wide variety of cable ties (52FS Range) and terminal blocks (44 Range).

IP degree	IP68 (at 3 bar)	Material	Nickel-plated brass
For cables Ø (mm)	from 4 to 9	Description	Cable gland
Type of pitch	M16	Operating temperature	-30 +100 °C
Electrocod	3651	Standard	EN 50262 - IEC 62444 - IEC/EN 60243

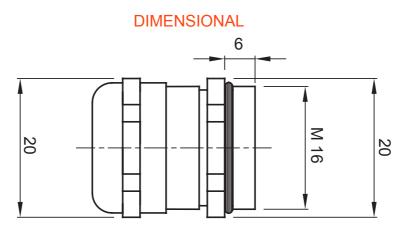

TECHNICAL SYMBOLOGY



IP68 (at 3 bar)

STANDARDS/APPROVALS



www.gewiss.com sat@gewiss.com Last update 20/04/2024 Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice