




Systems of accessories for electrical installations used for residential, tertiary and industrial applications. The system consists of fasteners for pipes and cables, cable fittings, accessories for rigid pipes (RK Series) and flexible conduit (DF Series). The system include also a wide variety of cable ties (52FS Range) and terminal blocks (44 Range).

|                          |                      |                      |  |
|--------------------------|----------------------|----------------------|--|
| IP degree                | IP68 (at 10 bar)     | Material             | Nickel-plated brass  |
| For cables Ø (mm)        | from 37 to 44        | Description          | Cable gland  |
| Type of pitch            | M63                  | Mounting hole Ø (mm) | 63   |
| Area                     | 1 (G) - 20 (D)       | Electrocod           | 230  |
| Ambient temperature      | -60 °C ≤ Ta ≤ +95 °C | Standard             | EN 50262 - IEC 62444 - EN 60079-0 - EN60079-7 - EN 60079-31 - EN 60079-7 - EN 60079-31 - IEC/EN 600243 |
| Installation temperature | -20 +95 °C           | ATEX Classification  | 2G 1D Ex e II tD A20 IP68  |

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids        |           | Bases        |           | Solvents  |           |           |               | Mineral oil | UV rays   |
|-----------------|--------------|-----------|--------------|-----------|-----------|-----------|-----------|---------------|-------------|-----------|
|                 | Concentrated | Diluted   | Concentrated | Diluted   | Hexane    | Benzol    | Acetone   | Ethyl alcohol |             |           |
| Resistant       | Resistant    | Resistant | Resistant    | Resistant | Resistant | Resistant | Resistant | Resistant     | Resistant   | Resistant |


#### DIMENSIONAL

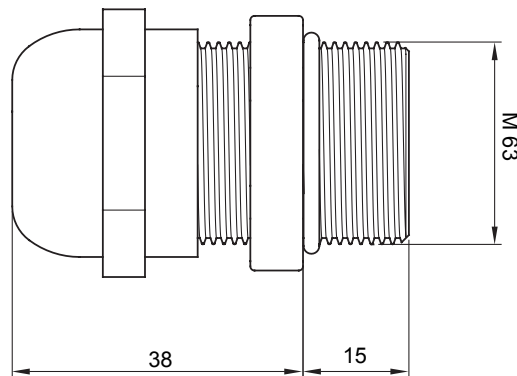

#### TECHNICAL SYMBOLOGY

IP

IP68 (at 10 bar)



-20 +95 °C

#### STANDARDS/APPROVALS

