





Protected and compact waterproof ceiling or wall lamp, entirely made of polycarbonate. Suitable for indoor and outdoor installations. It is characterized by high mechanical resistance to shocks and high degree of impact of electrical safety.

Application	Indoor / Outdoor	Version	Bolla 260 - LED with presence sensor
IP degree	IP55	Mechanical resistance	IK10
Insulation class	II	Glow Wire Test	850 °C
Device with reduced surface temperature	Compliant	Weight (kg)	1
Colour	Graphite grey	Voltage	230 V - 50 Hz
System power	25 W	Driver type	Constant Current Driver Led
Type of light source	LED - Not replaceable	Efficiency class of integrated LEDs	A ÷ A++
Lumen output (lm)	1620	Colour temperature	3000 K
Lamp supplied	LED	LED LifeTime (L80B20)	55000 h
Electrocod	2424		

### DIMENSIONAL

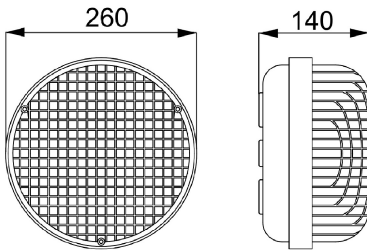

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



**IP**  
IP55

**IK**  
IK10



**GWT**  
850 °C



**CONSTANT  
CURRENT  
DRIVER**



### STANDARDS/APPROVALS

