




Street lighting with pole coupling (diameter 42÷76mm) in die-cast aluminium and technopolymer body. The pole coupling base can be tilted for arm pole or head pole installation. Optic in 99.85% polished and anodised aluminium. Anti-aging silicone gasket. Anti-condensation device in felt. Removable polyamide case containing electrical components, equipped with handle to facilitate the installation time. Two poles power supply terminal in double insulation for max. 2.5 mm² cables; PG 13.5 for cables with a diameter of 6.5÷11.5 mm. Flat glass 4 mm thick tempered and serigraphed. Ceramic lamp-holder fixed on components case. Flexible wiring cables 1-1.5 mm² in silicone with double insulation FG4G4.

| | | | |
|--|--------------------|-------------------------------------|---------------------|
| Application | External | IP degree | IP65 |
| Mechanical resistance | IK08 | Insulation class | II |
| Glow Wire Test | 650 °C | Maximum surface exposed to the wind | 0.23 m ² |
| Minimum distance from the illuminated object | 1 m | Tilt adjustable | +15° -15° |
| Weight (kg) | 9.9 | Colour | Graphite/Pearl |
| Voltage | 230 V - 50 Hz | Lamp | SE-ST |
| Lamp power | 50 W | Lamp current | 0.8 A |
| Lamp holder | E27 | Optical compartment protection | Flat glass |
| Optic | Cut-Off - ULOR: 0% | Warranty | 5 years |
| Electrocod | 244B | | |

DIMENSIONAL

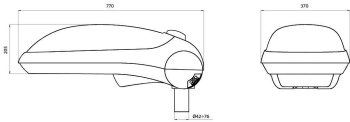

PHOTOMETRIC DISTRIBUTION

TECHNICAL SYMBOLOGY



IP
IP65

IK
IK08



GWT
650 °C


0.23 m²


1 m

