





Street lighting with pole coupling (diameter 42÷76mm) in die-cast aluminium and technopolymer body. The pole coupling base can be tilted for arm pole or head pole installation. Optic in 99.85% polished and anodised aluminium. Anti-aging silicone gasket. Anti-condensation device in felt. Removable polyamide case containing electrical components, equipped with handle to facilitate the installation time. Two poles power supply terminal in double insulation for max. 2.5 mm<sup>2</sup> cables; PG 13.5 for cables with a diameter of 6.5÷11.5 mm. Flat glass 4 mm thick tempered and serigraphed. Ceramic lamp-holder fixed on components case. Flexible wiring cables 1-1.5 mm<sup>2</sup> in silicone with double insulation FG4G4.

Application	External	IP degree	IP65
Mechanical resistance	IK08	Insulation class	II
Glow Wire Test	650 °C	Maximum surface exposed to the wind	0.23 m <sup>2</sup>
Minimum distance from the illuminated object	1 m	Tilt adjustable	+15° -15°
Weight (kg)	10	Colour	Graphite/Pearl
Voltage	230 V - 50 Hz	Lamp	ME-MT/SE-ST
Lamp power	70 W	Lamp current	1 A
Lamp holder	E27	Optical compartment protection	Flat glass
Optic	Cut-Off - ULOR: 0%	Warranty	5 years
Electrocod	244B		

### DIMENSIONAL

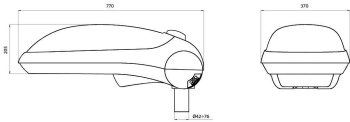

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



**IP**  
IP65

**IK**  
IK08



**GWT**  
650 °C

  
0.23 m<sup>2</sup>

  
1 m

