


# Product Data Sheet

## GWS2516

On request

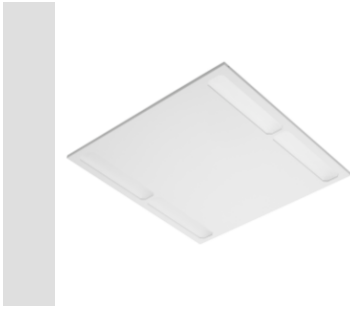


Recessed device for modular ceiling 600x600mm. Steel sheet body painted white. Plastic prismatic diffuser. Mid Power LED lighting source.

Application	Internal	Type	DALI
Installation	Flush mounting enclosures	Dimensions (mm)	600 x 600
Mechanical resistance	IK03	Voltage	220-240 V - 50/60 Hz
Voltage	220/240 V - 50/60 Hz - DALI	System power	31 W
Weight (kg)	3.1	Lamp	LED
Colour	White	Lumen output (lm)	4250
Optic	Diffused	IP degree	IP20
Insulation class	I	Driver type	Constant Current Driver Led
Operating temperature	-25 +25 °C	UGR	<=19
Warranty	5 years	Colour temperature	4000 K (CRI>80)
Type of light source	LED - Not replaceable	Efficiency class of integrated LEDs	A ÷ A++
Electrocod	2419	LED Life Time (L80B50)	50000 h

### DIMENSIONAL



### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



IK

IK03



IP

IP20



CONSTANT  
CURRENT  
DRIVER



### STANDARDS/APPROVALS

