





Recessed modular fixture suitable for interior lighting in offices and environments for the tertiary. Provided with microprismatized PMMA screen, it is the ideal solution for workstations with high visual comfort. Can also be installed in ceiling and suspended by dedicated accessories kit.

Application	Internal	Installation	Flush mounting enclosures
Dimensions (mm)	600 x 600	Mechanical resistance	IK04
Voltage	220/240 V - 50/60 Hz - Stand alone	System power	36 W
Weight (kg)	3.1	Lamp	LED
Colour	White	Lumen output (lm)	3960
IP degree	IP20 - IP40	Insulation class	II
Driver type	Driver Led	Operating temperature	-25 +40 °C
UGR	<=19	Warranty	5 years
Colour temperature	4000 K (CRI>80)	Efficiency class of integrated LEDs	A ÷ A++
Electrocod	2419	LED Life Time (L70B30)	50000 h

### DIMENSIONAL

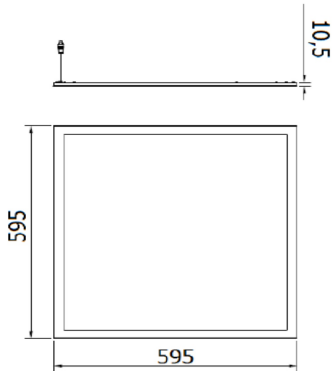

### PHOTOMETRIC DISTRIBUTION

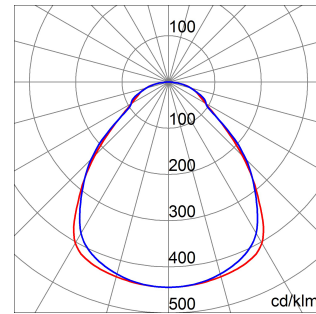

### TECHNICAL SYMBOLOGY



IK

IK04



IP

IP20 - IP40



### STANDARDS/APPROVALS

