



Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

Application	Indoor / Outdoor	Version	Emergency
Voltage	220-240 V - 50/60 Hz	Insulation class	I
Colour	Graphite grey	IP degree	IP55
Mechanical resistance	IK09	Glow Wire Test	850 °C
Minimum distance from the illuminated object	1 m	Operating temperature	-25 +25 °C
Efficiency class of compatible lamps	A	Lamp power	26-32 W
Driver type	EVG electronic reactor	Lamp holder	GX24q-3
Lamp	FSM	Autonomy	1 h
Accumulator type	Nickel-Cadmium	Luminous flux in emerg. [lm]	135 / 90
Weight (kg)	2.8	Electrocod	2415

DIMENSIONAL

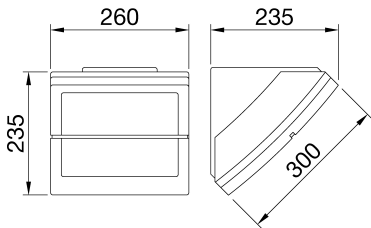

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP55



GWT  
850 °C



STANDARDS/APPROVALS

