



Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

Application	Indoor / Outdoor	Version	Standard
Voltage	230 V - 50 Hz	Insulation class	I
Colour	Graphite grey	IP degree	IP55
Mechanical resistance	IK09	Glow Wire Test	850 °C
Minimum distance from the illuminated object	1 m	Operating temperature	-25 +25 °C
Efficiency class of compatible lamps	A ÷ A+	Lamp power	70 W
Lamp supplied	SE*	Lamp included	Yes
Driver type	KCG electromagnetic reactor	Efficiency class of the lamp supplied	A
Lamp holder	E27	Weight (kg)	3.6
Electrocod	2415		

### DIMENSIONAL

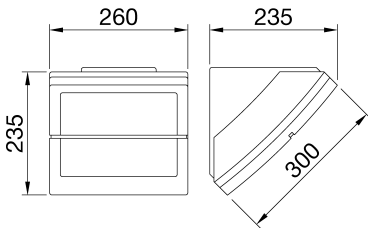

### PHOTOMETRIC DISTRIBUTION

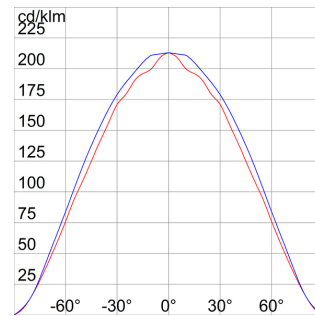

### TECHNICAL SYMBOLOGY



**IP**  
IP55

**IK**  
IK09

**GWT**  
850 °C



### STANDARDS/APPROVALS

