



Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite grey, white and midnight blue colors. Also available in the 13W and 26W LED version.

|  |                        |                       |            |
|--|------------------------|-----------------------|------------|
| Application                                  | Indoor / Outdoor       | Version               | Standard   |
| Voltage                                      | 220-240 V - 50/60 Hz   | Insulation class      | I          |
| Colour                                       | Graphite grey          | IP degree             | IP55       |
| Mechanical resistance                        | IK09                   | Glow Wire Test        | 850 °C     |
| Minimum distance from the illuminated object | 1 m                    | Operating temperature | -25 +25 °C |
| Efficiency class of compatible lamps         | A                      | Lamp power            | 26-32 W    |
| Driver type                                  | EVG electronic reactor | No. of lamps          | 2          |
| Lamp holder                                  | GX24q-3                | Lamp                  | FSM        |
| Weight (kg)                                  | 2.5                    | Electrocod            | 2415       |

### DIMENSIONAL

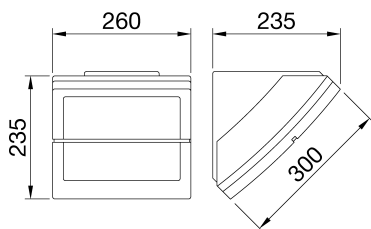

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



IP  
IP55

IK  
IK09

GWT  
850 °C



### STANDARDS/APPROVALS

