





Protected and compact waterproof ceiling or wall lamp, entirely made of polycarbonate. It is characterized by high mechanical resistance to shocks and high degree of impact of electrical safety with double possibility of entry for feeding, in the lower or lateral part of the ceiling light.

|                                      |                  |                  |      |
|--------------------------------------|------------------|------------------|------|
| Application                          | Indoor / Outdoor | IP degree        | IP44 |
| Mechanical resistance                | IK10             | Insulation class | II   |
| Glow Wire Test                       | 850 °C           | Weight (kg)      | 0.3  |
| Colour                               | Grey RAL 7035    | Lamp holder      | E27  |
| Efficiency class of compatible lamps | D ÷ A+           | Max lamp power   | 60 W |
| Electrocod                           | 2415             |                  |      |

#### DIMENSIONAL

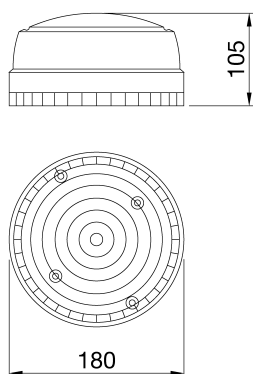

#### PHOTOMETRIC DISTRIBUTION



#### TECHNICAL SYMBOLOGY



**IP**  
IP44

**IK**  
IK10



**GWT**  
850 °C

#### STANDARDS/APPROVALS

