

Product Data Sheet

GWJ1001A




JOINON range



The floor-standing I-ON charging stations are the JOINON solutions for public and semi-public access, designed for charging electric vehicles and to withstand any wear including impacts, stress, vandalism and atmospheric agents. They are the first and only on the market able to guarantee the IP55 level of protection. The special hexagonal design allows the units to be adapted into any urban context and parking configuration, with a targeted focus on the User Experience for the Driver. They are available with standard JoinOn graphics, which may be customised on request.

INPUT		- Socket/Connector Nr. (Type)	2 (Type 2 socket, with shutters)
Terminal blocks	3 x 35 mm ²	Charging activation	Free access
Rated current	64 A	Human Interface	LED RGB and TFT Display
Total power	15 Kilowatt	Connectivity	No
OUTPUT		- MECHANICAL FACTS	-
Rated voltage	230 V	Mounting and installation	Floor mounting
Colour	Grey, Headboard RAL 7011	Power max.	7,4 kW per socket
Material	Steel sheet	Thermal-magnetic protection	40A - 2P - Curve D
External treatments	Anti-corrosion and anti-graffiti	Type of residual current protection	40 A - 2P - Type B
IP degree	IP55	Power meter	No
Mechanical resistance	IK10	DC Leakage check	Not needed
Operating temperature	-25 +50 °C	(Auto)restart electrical protections	No
Customizations	Yes (front)		

DIMENSIONAL

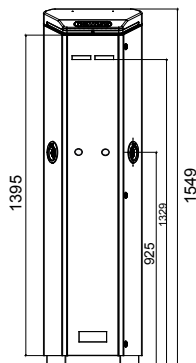

TECHNICAL SYMBOLOGY

IP

IP55

IK

IK10

STANDARDS/APPROVALS



GEWISS S.p.A. Via Domenico Bosatelli 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 30/04/2025

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice