




Type 2 mobile connector, compliant with IEC 62196-1 and IEC 62196-2, designed for charging electric vehicles compliant with IEC 61851-1 regulations, equipped with an external textured coating on the lower portion to improve grip and facilitate insertion into the relative inlet. It is supplied pre-wired with a smooth 5/8 m cable or 4 m spiral cable. This product is also equipped with a rubber cable gland and has an IP55 protection rating if inserted in its protective insulating cover. Brand customisation options are available.

| | | | |
|-----------------------|---|-----------------------------|---------------------------|
| Handle colour | Black RAL 9004 | IP degree | IP55 (with sheath or cap) |
| Mechanical resistance | IK10 | Cable gland and plug colour | Black RAL 9004 |
| Glow wire test | 850°C (active parts) / 650°C (external) | Number of poles | L1 - N - PE - CC - CP |
| Rated current | 32 A | Stocking temperature | -30°C + +50 °C |
| Wiring section | 2.5 mm² | Rated frequency (Hz) | 50/60 Hz |
| Cable length | 5 m | Cable colour | Black |
| Cable type | Smooth | | |

DIMENSIONAL

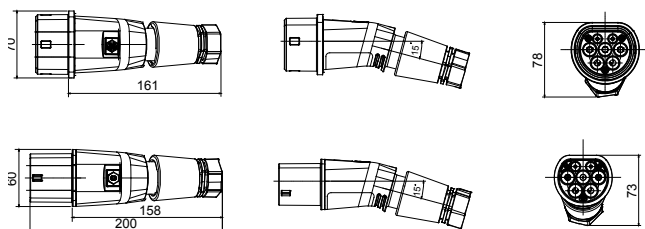

TECHNICAL SYMBOLOGY

IP

IP55 (with sheath or cap)

IK

IK10

GWT

850°C (active parts) / 650°C (external)

STANDARDS/APPROVALS

