




|                                  |         |                |        |
|----------------------------------|---------|----------------|--------|
| Top entries                      | 2xØ 23  | Glow Wire Test | 650 °C |
| Houseable interloc. socket       | 1       | IP degree      | IP55   |
| Mechanical resistance            | IK08    | Side entries   | 2xØ 23 |
| Houseable IB socket-outlets      | 16/32 A | Electrocod     | 2221   |
| Minimum installation temperature | -25°C   |                |        |

### DIMENSIONAL

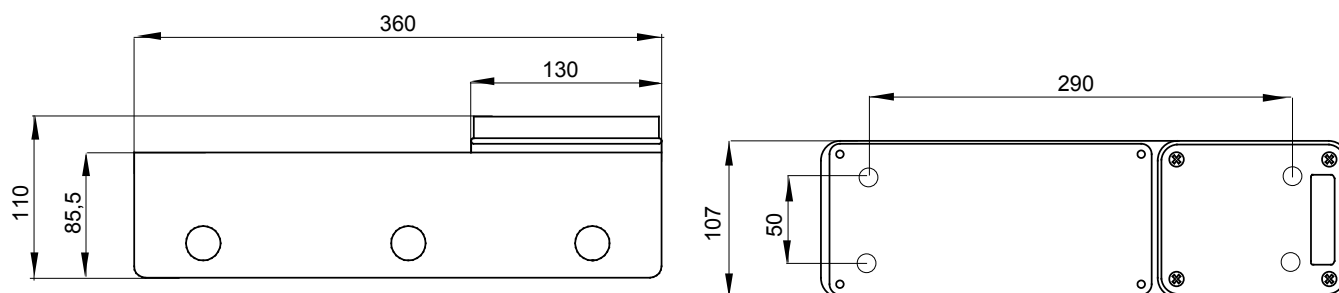

### TECHNICAL SYMBOLOGY

**GWT**

650 °C

**IP**

IP55

**IK**

IK08

### STANDARDS/APPROVALS

