Product Data Sheet

GWS2406

EXTRO Range



Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

Application	Indoor / Outdoor	Version	LED with presence detector
Voltage	220-240 V - 50/60 Hz	Insulation class	I
Colour	Graphite grey	IP degree	IP55
Mechanical resistance	IK09	Glow Wire Test	850 °C
Minimum distance from the illuminated object	1 m	Operating temperature	-25 +25 °C
Nominal flux (lm)	1200	Lamp	LED
System power	13 W	Colour temperature	4000 K (CRI>80)
Lumen output (lm)	1000	Efficiency class of integrated LEDs	A ÷ A++
Type of light source	LED - Not replaceable	Weight (kg)	2.2
Warranty	Can be extended	Electrocod	2424
LED Life Time (L70B50)	50000 h		

DIMENSIONAL

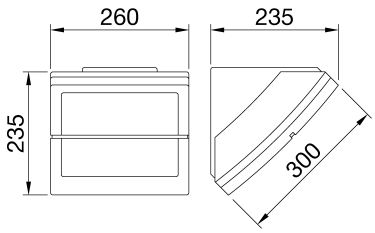

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY

IP	IK	GWT		
IP55	IK09	850 °C	1 m	

STANDARDS/APPROVALS

CE

Data, measures, designs and pictures are for information purpose only, last update 24/04/2024. They can be changed at any moment, therefore it is always ecommended to read the last updated version published on the website www.gewiss.com.Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at https://www.gewiss.com/it/en/company/landingpage/led-warranty. - 1 of 1