



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and metal, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.

DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.


The series is completed with versions for board from 16 A to 800 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.

The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.

Wy??czniki	Izolator obrotowy	Wersja	Skrzynka
Materia?	Izolacja	Typ	Sterowanie
Pr?d znamionowy (A)	16	Liczba biegunów	4P
Kolor ga?ki	Czarny	Zamykany	TAK (maks. 3 blokad w trybie ON i OFF)
Ochrona IP	IP66/IP67/IP69	Odporno?? na wstrz?szy	IK08
Temperatura otoczenia	-25 +60 °C	?ruby pokrywy (nr i typ)	4 izolacja, 1/4 obrotu
Pr?d w AC21A (415V)	16	otworów wej?cie	2 x M20/25 + 2 x M20/25
Pr?d w AC22A (415V)	16	Typ wyposa?enie dodatkowe	Maks. 2 styki pomocnicze (1 na stron?)
Pr?d w AC23A (415V)	16	Kabel przekrój	1-10 mm <sup>2</sup>



### DIMENSIONAL

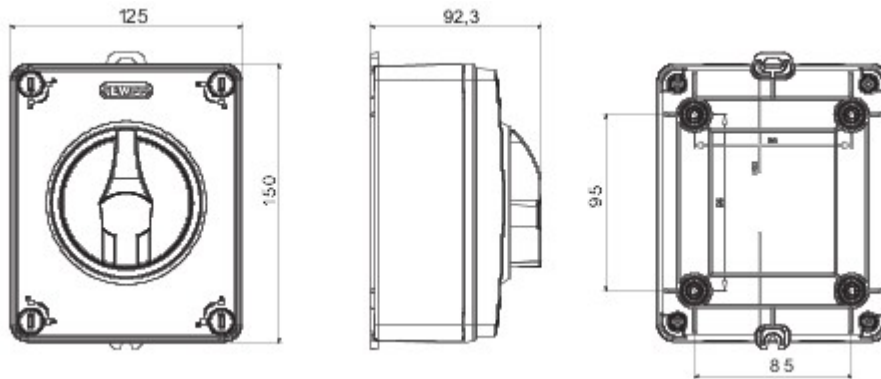

### TECHNICAL SYMBOLOGY

**IP**      **IK**

IP66/IP67/IP69

IK08

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 23/04/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice