



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and metal, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.

DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.


The series is completed with versions for board from 16 A to 800 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.

The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.

Wyposażniki	Izolator obrotowy	Wersja	Skrzynka
Materiał	Metal	Typ	Dla sytuacji awaryjnych
Prąd znamionowy (A)	100	Liczba biegunów	3P
Kolor gałki	Czerwony	Zamykany	TAK (maks. 3 blokady w trybie OFF)
Ochrona IP	IP66	Odporność na wstrząsy	IK10 (puszka); IK08 (pokrytka)
Temperatura otoczenia	-25 +60 °C	Gruby pokrywy (nr i typ)	4 metalowe gruby
Prąd w AC21A (415V)	100	Prąd w AC22A (415V)	100
Typ wyposażenie dodatkowe	Maks. 4 styki pomocnicze (2 na stronę)	Prąd w AC23A (415V)	100
Kabel przekrój	4-70 mm <sup>2</sup>		



### DIMENSIONAL

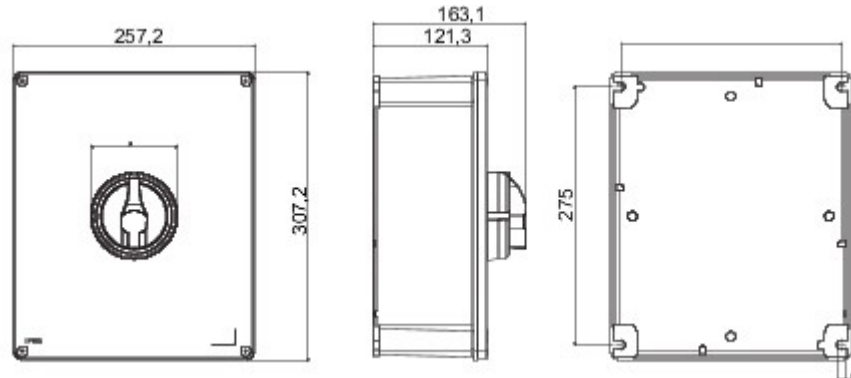

### TECHNICAL SYMBOLOGY

**IP**

IP66

**IK**

IK10 (puszka); IK08 (pokrytka)

### STANDARDS/APPROVALS

