



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and metal, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.

DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.


The series is completed with versions for board from 16 A to 800 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.

The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.

| Wyposażniki               | Izolator obrotowy                      | Wersja                   | Skrzynka                           |
|---------------------------|--|--------------------------|------------------------------------|
| Materiał                  | Metal                                  | Typ                      | Dla sytuacji awaryjnych            |
| Prąd znamionowy (A)       | 160                                    | Liczba biegunów          | 3P                                 |
| Kolor gałki               | Czerwony                               | Zamykany                 | TAK (maks. 3 blokady w trybie OFF) |
| Ochrona IP                | IP66                                   | Odporność na wstrząsy    | IK10 (puszka); IK08 (pokrytka)     |
| Temperatura otoczenia     | -25 +60 °C                             | Gruby pokrywy (nr i typ) | 4 metalowe gruby                   |
| Prąd w AC21A (415V)       | 160                                    | Prąd w AC22A (415V)      | 125                                |
| Typ wyposażenie dodatkowe | Maks. 4 styki pomocnicze (2 na stronę) | Prąd w AC23A (415V)      | 125                                |
| Kabel przekrój            | 4-70 mm <sup>2</sup>                   |                          |                                    |



### DIMENSIONAL

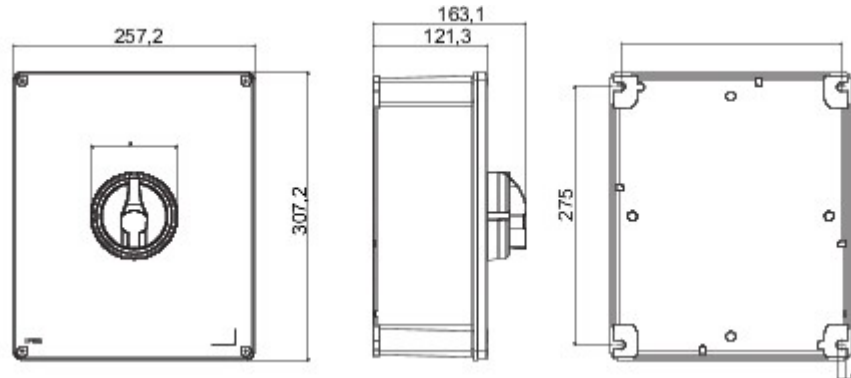

### TECHNICAL SYMBOLOGY

**IP**      **IK**

IP66      IK10 (puszka); IK08 (pokrytka)

### STANDARDS/APPROVALS

