




Smart Gateway is the central element of the Home and Building PRO solution. It enables the centralisation of logic and automation management functions for the home, the collection of data from home sensors, sending of commands to actuators, communication with cloud applications. It transfers data from networks of connected devices (KNX, ZigBee, etc.) to devices and client applications, allowing information to be exchanged between devices with different communication protocols. The management of functions and data access takes place through the cloud platform, via a dedicated app (for PCs, smartphones and tablets).

Opis	Brama wieloprotokolowa	Typ licencji	Z nieograniczonych licencji
Kolor	Biały	Zasilanie wyjściowe	12 V dc - 1 A
Akumulatory wejściowe	7 VA	Połączenia radiowe	Wi-Fi (IEEE 802.11 b/g/n), Zigbee (IEEE 802.15.4)
Interfejsy sterowania	USB 2.0, RJ45, KNX	Zużycie szyny KNX (mA)	5
Ochrona IP	Via cloud	Norma	2014/53/EU, 2009/125/EU, 2011/65/EU, 2012/19/EU
Długość Temperatury	IP20	Wymiary (mm)	171x110x30
Wilgotność względna (bez kondensacji)	-5 ÷ +45 °C	Temperatura przechowywania	-20 ÷ +80 °C
	Max 93%	Electrocod	3800

## DIMENSIONAL

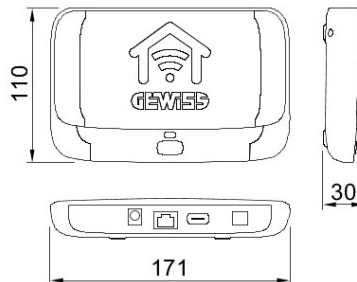

## TECHNICAL SYMBOLOGY

**IP**

IP20

## STANDARDS/APPROVALS

**CE**