




Type 2 mobile connector, compliant with IEC 62196-1 and IEC 62196-2, designed for charging electric vehicles compliant with IEC 61851-1 regulations, equipped with an external textured coating on the lower portion to improve grip and facilitate insertion into the relative inlet. It is supplied pre-wired with a smooth 5/8 m cable or 4 m spiral cable. This product is also equipped with a rubber cable gland and has an IP55 protection rating if inserted in its protective insulating cover. Brand customisation options are available.

Kolor uchwyty	Czarny RAL 9004	Ochrona IP	IP55 (z os?on? lub za?lepk?)
Odporno?? na wstrz?sy	IK10	Kolor d?awika kablowego i wtyczki	Czarny RAL 9004
Pr?ba roz?arzonym drutem	850°C (cz??ci aktywne) / 650°C (zewn?trzne)	Liczba biegun?w	L1/L2/L3 - N- PE - CC - CP
Pr?d roboczy	16 A	Temperatura przechowywania	-30°C ÷ +50 °C
Przekr?j okablowania	6 mm ²	Pr?d cz?stotliwo?? (Hz)	50/60 Hz
D?ugo?? kabla	8 m	Kolor kabla	Czarny
Rodzaj kabla	G?adkie		

DIMENSIONAL

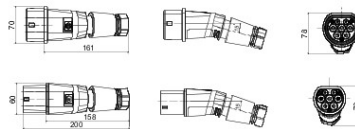

TECHNICAL SYMBOLOGY

IP **IK** **GWT**

IP55 (z os?on? lub za?lepk?)

IK10

850°C (cz??ci aktywne) / 650°C (zewn?trzne)

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 01/05/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice