




Pliable protected conduit system range FKMF Superspeed, with an internal layer for a high cable sliding speed (for diameters 20, 25, 32 mm). It is made in self-extinguishing PP: classification 33232, available in seven diameter from 16 to 63 mm. Suitable for electrical system and/or data transmission for installation: mainly flush-mounted in floors, walls and ceilings buried in concrete.

Colour	Grey	Material	PP self-extinguishing
Type	without cable puller	Conduits Ø (mm)	20
Resistance to compression	3 (Medium - 750 N)	Resistance to impact	3 (Medium - 2 J)
Lower temperature range	2 (-5 °C)	Upper temperature range	3 (+105 °C)
Resistance to bending	2 (Pliable)	Electrical characteristics	2 (With electrical insulating characteristics)
Protection against ingress of water	0	Resistance against corrosion	Not applicable to plastic conduit systems
Fire resistance	1 (Non-flame propagating)	Insulation resistance	100 MΩ a 500 V for 1 minute
Protection against ingress of solid objects with GF coupling	4	Dielectric rigidity	2000 V a 50 Hz for 15 minutes
Minimum bending radius (mm)	90	Standard	EN 61386-1 (VDE 0605-1); EN 61386-22 (VDE 0605-22)

DIMENSIONAL

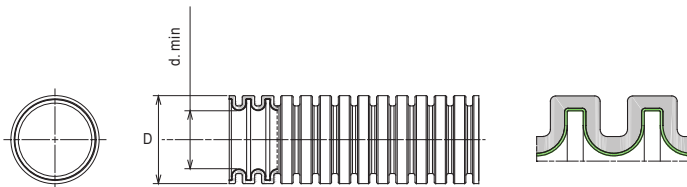

	D	d. min.
DX 24 216R	16	10.7
DX 24 220R	20	14.1
DX 24 225R	25	18.3
DX 24 232R	32	24.3
DX 24 240R	40	31.2
DX 24 250R	50	39.6
DX 24 263R	63	50.6

TECHNICAL SYMBOLOGY



3 (Medium - 750 N)

3 (Medium - 2 J)

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and
coordination of Polfin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 26/05/2026

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice