
Product Data Sheet
DX26716W
RK Range

Light rigid conduits RK9 HF range, made of PP, classification 23431, available in four diameters, from 16 to 32 mm, 3-metre long in white RAL 9010. Halogen free according to the Standard EN 50642. Suitable for electrical and/or data transmission systems in the tertiary and offices, where aesthetic is a plus. They can be integrated with spiralled sheaths and wall mounting enclosures. Completing the offer, a wide range of accessories and routing components from IP40 to IP67 protection rating. The RK9 HF conduits comply with Product Standard EN 61386-1 and EN 61386-21.

Colour	White RAL 9010	Material	PP HF
Length (m)	3	Conduits Ø (mm)	16
Glow Wire Test	960 °C	Halogen Free	Yes, according to EN 50642
Low smoke	Low smoke in according to EN 61034-2	Resistance to compression	2 (Light - 320 N)
Resistance to impact	3 (Medium - 2 J)	Resistance to bending	1 (Rigid)
Electrical characteristics	2 (With electrical insulating characteristics)	Protection against ingress of solid objects without accessories	0
Protection against ingress of water objects without accessories	0	Resistance against corrosion	Not applicable to plastic conduit systems
Fire resistance	1 (Non-flame propagating)	Protection against ingress of solid objects with accessories	4/6 (It depends on the accessories used)
Protection against ingress of water with accessories	0/5/7 (It depends on the accessories used)	Standard	EN 61386-1 EN 61386-21
Family	RK9 HF	Classification	23431

DIMENSIONAL

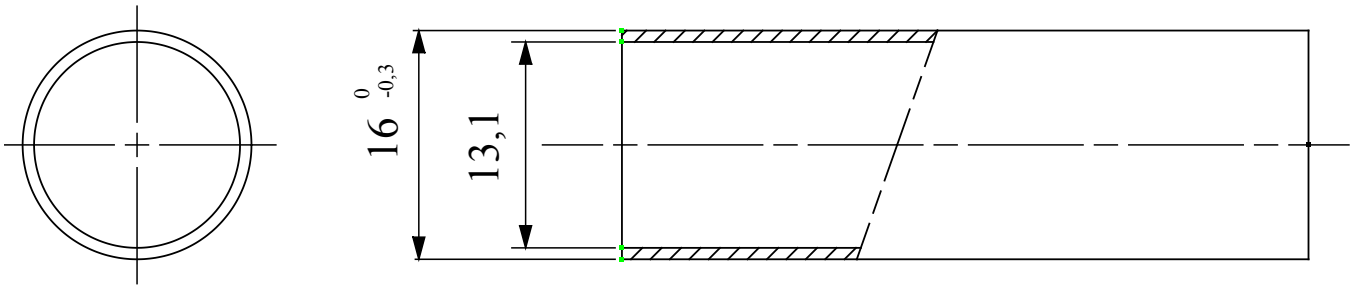

TECHNICAL SYMBOLOGY



960 °C

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 07/11/2026

Data, measures, designs and pictures are shown only as informative purposes,
and could be changed without previous notice