




The system of medium rigid protective conduits made of high quality PVC to offer superior performance. Available in diameters from 16 to 32 mm and in lengths from 2 to 3 m. They can be integrated with flexible conduits and junction boxes. Completing the offer, a wide range of couplings and routing components with IP40 and IP67 degree of protection.

|  |   |  |  |
|--|---|--|--|
| Colour   | Grey RAL 7035                             | Material   | PVC  |
| Length (m)   | 3   | Conduits Ø (mm)  | 16   |
| Glow Wire Test   | 960 °C                                    | Electrocod   | 21220  |
| Resistance to compression  | 3 (Medium - 750 N)                        | Resistance to impact   | 3 (Medium - 2 J)                               |
| Resistance to bending  | 1 (Rigid)                                 | Electrical characteristics   | 2 (With electrical insulating characteristics) |
| Protection against ingress of solid objects without accessories                        | 0   | Protection against ingress of water objects without accessories                                | 0  |
| Resistance against corrosion   | Not applicable to plastic conduit systems | Fire resistance  | 1 (Non-flame propagating)                      |
| Insulation resistance  | 100 MΩ a 500 V for 1 minute               | Protection against ingress of solid objects with accessories (depends on the accessories used) | 40 (Class 1)                                   |
| Protection against ingress of water with accessories (depends on the accessories used) | 55 (Class 1)                              | Dielectric rigidity  | 2000 V a 50 Hz for 15 minutes                  |
| Standard   | EN 61386-1 EN 61386-21                    | Family   | IRL/B  |
| Classification   | 33211                                     | Conduit type   | Sleeved  |

### DIMENSIONAL

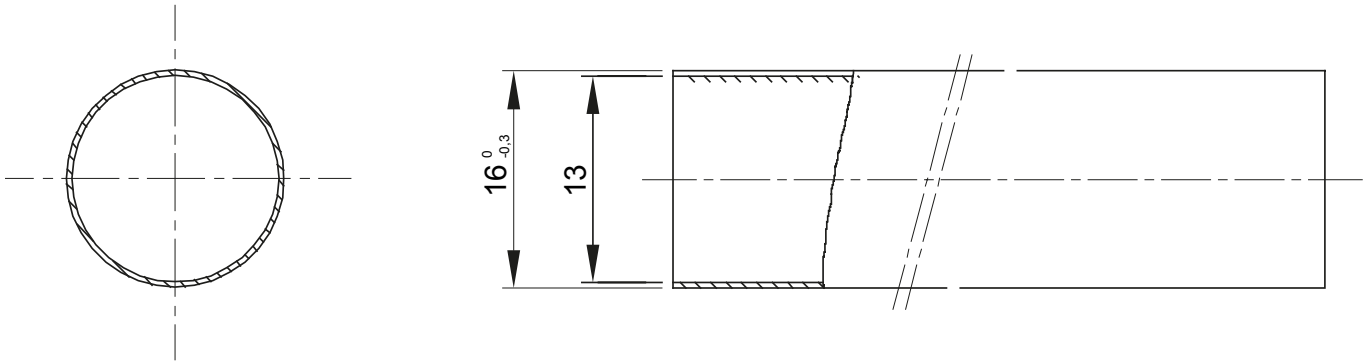

### TECHNICAL SYMBOLOGY



960 °C

### STANDARDS/APPROVALS

