Product Data Sheet

GW10679


CHORUSMART - Domestic range



Flush-mounting axial auxiliary module with two commands. Two axial push-buttons on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The device must be completed with one of the front buttons key available.

Description	2-channel auxiliary axial control	Power supply	100 ÷ 240 V ac - 50/60 Hz
No. modules	1	No. input channels	-
Local control	Via 2 front push buttons (to complete with button key)	Auxiliary input channel voltage	-
Stocking temperature	-25 ÷ +70 °C	N. of LED input channels	2
Working temperature	-5 ÷ +45 °C	LED input channels voltage	100 ÷ 240 V ac - 50/60 Hz
Relative humidity (non-condensative)	Max 93%	No. output channels	2
Front light signaling	Blue led	Output contacts	n. 2 x 1 A (AC1)
Wiring terminals	With screw	240 V ac Incandescent-halogen lamps	-
Terminal tightening capacity stranded cables (mm²)	Max. 1.5	240 V ac LED lamps	-
Terminal tightening capacity solid cables (mm²)	Max. 1.5	Loads piloted from electronic transf. 240 V ac	-
Context	Dry indoor places	240 V Fluorescent lamps	-
IP degree	IP20 (with button key)	Load control	-
Standard	2014/35/EU (LVD), 2011/65/EU + 2015/863 (RoHS), EN 60669-1, EN IEC 63000		

DIMENSIONAL

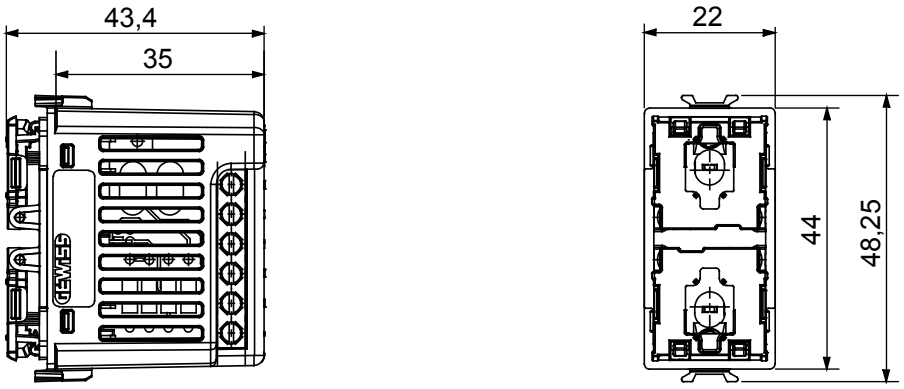

TECHNICAL SYMBOLOGY

IP

IP20 (with button key)

STANDARDS/APPROVALS

CE UKCA Reach Declaration

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 30/10/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice