




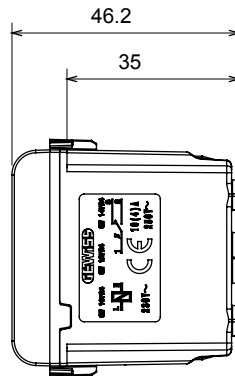

A range of ChoruSmart modular devices and plates made of antibacterial technopolymer in a glossy white finish, suitable for use in hospitals, nursing homes, schools and wherever cleanness and hygiene are essential. The effective silver-ion antibacterial treatment can reduce bacterial growth by 99% within 24 hours and has been verified by certified laboratory testing in accordance with standard ISO 22196 (analysis of major strains of Staphylococcus aureus and E. coli bacterial species).

|                                                              |                              |                                                                 |                                       |
|--------------------------------------------------------------|------------------------------|-----------------------------------------------------------------|---------------------------------------|
| Category                                                     | Call relay                   | Output contacts                                                 | 1NO/NC 12 V (max. 1 A)                |
| Colour                                                       | Glossy white                 | Supply voltage                                                  | 12 V ac/dc                            |
| Description                                                  | Call relay                   | No. of poles                                                    | 1P                                    |
| Voltage                                                      | 12 V ac/dc                   | Standard                                                        | EN 60669-1 - EN 60669-2-2 - ISO 22196 |
| Resistance at test voltage                                   | 2000 V at 50 Hz for 1 minute | Insulation resistance                                           | > 5 MOhm                              |
| Wiring terminals                                             | With screw                   | Prolonged operation switch (no.of position changes)             | 40.000 at In 250 V ac cosφ=0,6        |
| Thermo-pressure with ball                                    | 125 °C                       | Glow Wire Test                                                  | 850 °C                                |
| Terminal grip on cable traction                              | > 50 N                       | Terminal tightening capacity stranded cables (mm <sup>2</sup> ) | min. 0,75 - max. 2x4                  |
| Terminal tightening capacity solid cables (mm <sup>2</sup> ) | min. 0,5 - max. 2x2,5        | No. modules                                                     | 1                                     |
| Material                                                     | Antibacterial tecnopolymer   | Electrocod                                                      | 140                                   |

### DIMENSIONAL



### TECHNICAL SYMBOLOGY



### STANDARDS/APPROVALS

