Product Data Sheet
GW10922


CHORUSMART - domestic range



Flush-mounting touch switch module. Two touch areas on the front for switching an ON/OFF load (bistable/momentary function) or a timed ON load via an output contact with potential. The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol. The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

Description	Touch one-way switch	Power supply	100 ÷ 240 V ac - 50/60 Hz
No. modules	1	No. input channels	2
Local control	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Auxiliary input channel voltage	100 ÷ 240 V ac - 50/60 Hz
Stocking temperature	-25 ÷ +70 °C	No. output channels	1
Working temperature	-5 ÷ +45 °C	Output contacts	1 NO 5 A (AC1) 240 V ac
Relative humidity (non-condensative)	Max 93%	240 V ac Incandescent-halogen lamps	Max 1000 W
Front light signaling	Blue led	240 V ac LED lamps	Max 100 W (max 5 lamps)
Wiring terminals	With screw	Loads piloted from electronic transf. 240 V ac	Max 250 VA
Terminal tightening capacity stranded cables (mm²)	Max. 1.5	240 V Fluorescent lamps	Max 120 W (max 6 lamps)
Terminal tightening capacity solid cables (mm²)	Max. 1.5	Load control	-
Context	Dry indoor places	Acoustic signalling element	Buzzer
IP degree	IP20 (with plate fitted)	Standard	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000

DIMENSIONAL

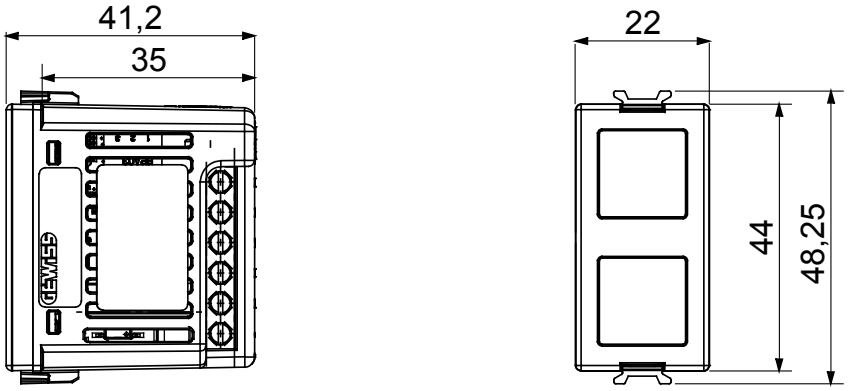

TECHNICAL SYMBOLOGY

IP

IP20 (with plate fitted)

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 01/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice