Product Data Sheet
GW10923


CHORUSMART - Domestic range



Flush-mounting touch dimmer module. Two touch areas on the front for switching the connected load ON and OFF (short press) or for regulating the brightness (long press). The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol. The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

Description	Dimmer touch	Power supply	100 ÷ 240 V ac - 50/60 Hz
No. modules	1	No. input channels	2
Local control	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Auxiliary input channel voltage	100 ÷ 240 V ac - 50/60 Hz
Stocking temperature	-25 ÷ +70 °C	No. output channels	1
Working temperature	-5 ÷ +45 °C	Relative humidity (non-condensative)	Max 93%
240 V ac Incandescent-halogen lamps	4 ÷ 150 W	Front light signaling	Blue led
240 V ac LED lamps	4-150 W (max 10 lamps)	Wiring terminals	With screw
Loads piloted from electronic transf. 240 V ac	4 ÷ 150 VA (240 V ac)	Terminal tightening capacity stranded cables (mm²)	Max. 1.5
240 V Fluorescent lamps	-	Terminal tightening capacity solid cables (mm²)	Max. 1.5
Load control	Trailing edge	Context	Dry indoor places
Acoustic signalling element	Buzzer	IP degree	IP20 (with plate fitted)
Standard	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000		

DIMENSIONAL

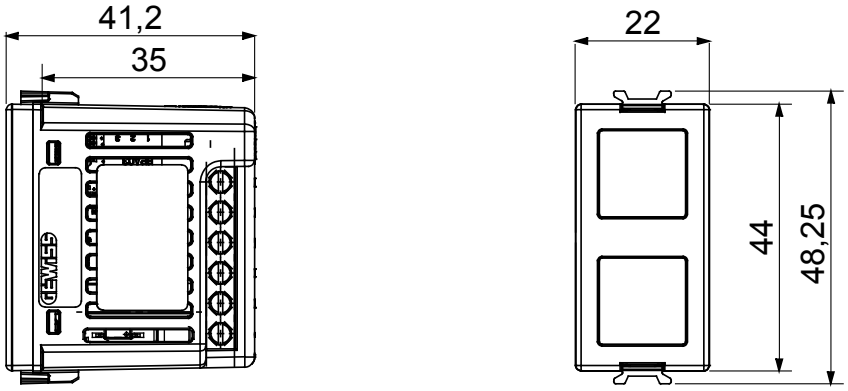

TECHNICAL SYMBOLOGY

IP

IP20 (with plate fitted)

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 01/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice