Product Data Sheet

GW10924


CHORUSMART - Domestic range



Flush-mounting auxiliary touch module with one command. Two touch areas on the front, this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, TOUCH and EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol.

Description	Auxiliary touch 1-command module	Power supply	100 ÷ 240 V ac - 50/60 Hz
No. modules	1	No. input channels	-
Local control	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Auxiliary input channel voltage	-
Stocking temperature	-25 ÷ +70 °C	No. output channels	1
Working temperature	-5 ÷ +45 °C	Output contacts	-
Relative humidity (non-condensative)	Max 93%	240 V ac Incandescent-halogen lamps	-
Front light signaling	Blue led	240 V ac LED lamps	-
Wiring terminals	With screw	Loads piloted from electronic transf. 240 V ac	-
Terminal tightening capacity stranded cables (mm²)	Max. 1.5	240 V Fluorescent lamps	-
Terminal tightening capacity solid cables (mm²)	Max. 1.5	Load control	-
Context	Dry indoor places	Acoustic signalling element	Buzzer
IP degree	IP20 (with plate fitted)	Standard	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000

DIMENSIONAL

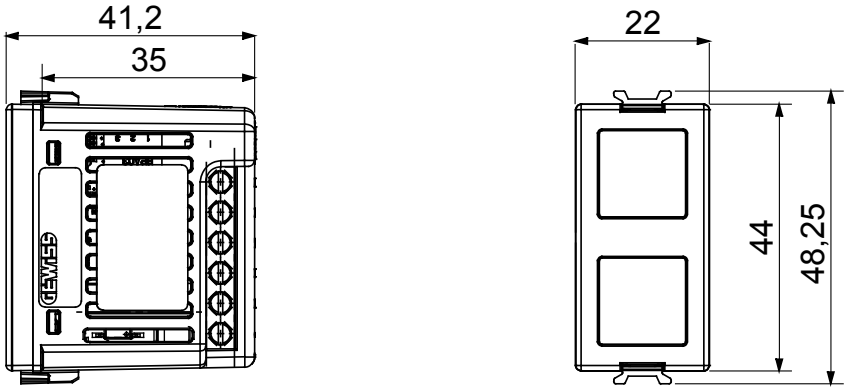

TECHNICAL SYMBOLOGY

IP

IP20 (with plate fitted)

STANDARDS/APPROVALS

CE UKCA Reach Declaration

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 01/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice