


The System modular devices make it possible to create infinite combination between devices and plates, thanks to a complete range that is able to satisfy all design, functional and installation requirements. Colour and finiture: glossy white, bright and versatile. Ideal for flush-mounting solutions (for rectangular or square boxes), surface-mounting solutions, and for special applications. The range includes commands, socket- outlets, protection, indicators, connectors and devices for the control, safety and comfort of your home.

|  |                              |   |                                |
|--|------------------------------|---|--------------------------------|
| Category   | Power                        | Description   | 2P+E - 10 A                    |
| Colour   | White                        | Voltage   | 250 V ac                       |
| Earth pit  | -                            | Standard  | Australian                     |
| Characteristics  | -                            | For plug pins   | Flat                           |
| Wiring terminals   | With screw                   | Standard  | IEC 60884-1; AS/NZS 3112       |
| Resistance at test voltage                                   | 2000 V at 50 Hz for 1 minute | Prolonged operation switch (no.of position changes)             | 10.000 at In 250 V ac cosφ=0,8 |
| Thermo-pressure with ball                                    | 125 °C                       | Glow Wire Test  | 850 °C                         |
| Terminal grip on cable traction                              | > 50 N                       | Terminal tightening capacity stranded cables (mm <sup>2</sup> ) | min. 1,5 - max. 2x4            |
| Terminal tightening capacity solid cables (mm <sup>2</sup> ) | min. 1,5 - max. 2x2,5        | No. SYSTEM modules  | 2                              |
| Material   | Technopolymer                | Electrocod  | 0131                           |

#### DIMENSIONAL

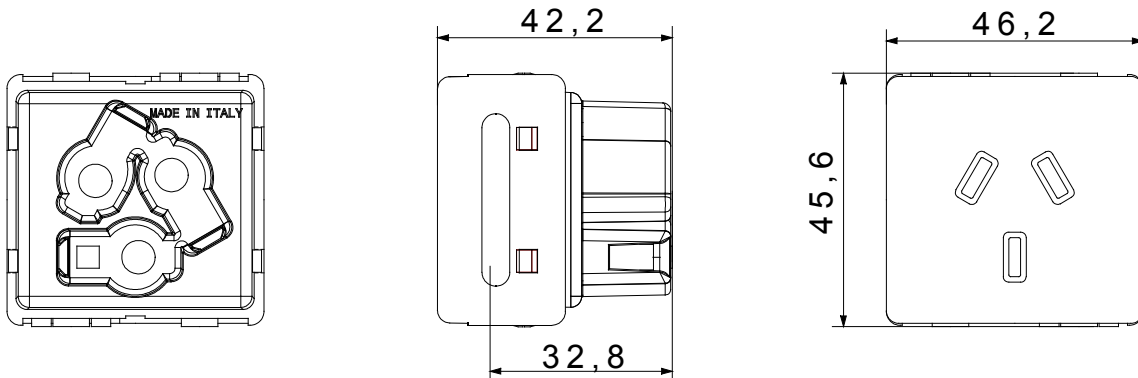

#### TECHNICAL SYMBOLOGY



#### STANDARDS/APPROVALS

