




The System modular devices allow the creation of infinite combinations of devices and plates, through a complete range that covers all design, functional and installation needs. Colours and finishes: satin black, elegant and classy. Ideal for flush-mounted solutions (for rectangular or square boxes), surface-mounted solutions and special applications. The range includes control units, socket-outlets, breakers, indicators, connectors and devices for the control, safety and comfort of your home

|                                                              |                              |                                                                 |                                |
|--------------------------------------------------------------|------------------------------|-----------------------------------------------------------------|--------------------------------|
| Category                                                     | Socket-Outlet                | Description                                                     | 2x2P+E 16 A dual amp.          |
| Colour                                                       | Black                        | Voltage                                                         | 250 V ac                       |
| Earth pit                                                    | -                            | Standard                                                        | English                        |
| Characteristics                                              | With safety shields          | For plug pins                                                   | Ø 4 / 5 mm                     |
| Wiring terminals                                             | With screw                   | Type                                                            | P17-11                         |
| Resistance at test voltage                                   | 2000 V at 50 Hz for 1 minute | Prolonged operation switch (no.of position changes)             | 10.000 at In 250 V ac cosφ=0,8 |
| Thermo-pressure with ball                                    | 125 °C                       | Glow Wire Test                                                  | 850 °C                         |
| Terminal grip on cable traction                              | > 50 N                       | Terminal tightening capacity stranded cables (mm <sup>2</sup> ) | min. 0,75 - max. 2x4           |
| Terminal tightening capacity solid cables (mm <sup>2</sup> ) | min. 0,5 - max. 2x2,5        | No. SYSTEM modules                                              | 2                              |
| Material                                                     | Technopolymer                | Electrocod                                                      | 0131                           |

#### DIMENSIONAL

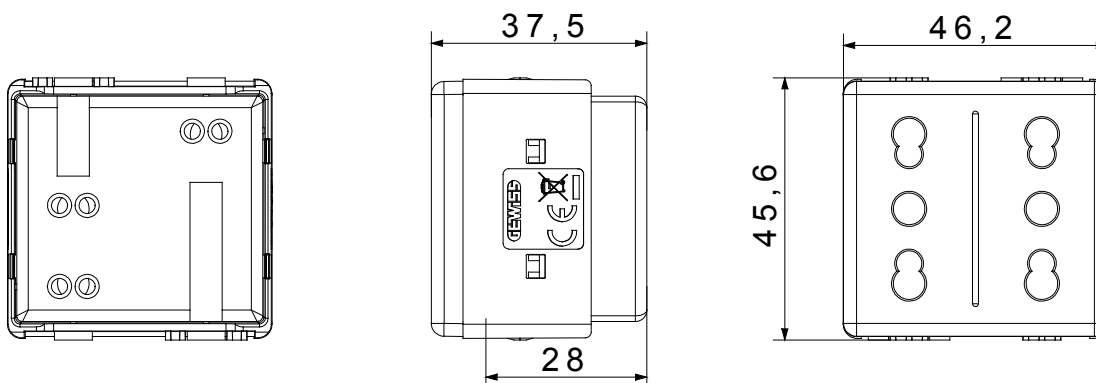

#### TECHNICAL SYMBOLOGY



#### STANDARDS/APPROVALS

