




The System modular devices allow the creation of infinite combinations of devices and plates, through a complete range that covers all design, functional and installation needs. Colours and finishes: satin black, elegant and classy. The range includes control units, socket-outlets, breakers, indicators, connectors and devices for the control, safety and comfort of your home.

|                                                              |                                  |                                                                 |                                |
|--------------------------------------------------------------|----------------------------------|-----------------------------------------------------------------|--------------------------------|
| Category                                                     | Push-button                      | Button key                                                      | With replaceable neutral lens  |
| Symbol                                                       | -                                | Colour                                                          | Black                          |
| Description                                                  | 1P NO - 10 A backlit             | Voltage                                                         | 250 V ac                       |
| Signalling unit                                              | Red fluorescent 230 V ac (0.4 W) | Standard                                                        | EN 60669-1                     |
| Resistance at test voltage                                   | 2000 V at 50 Hz for 1 minute     | Insulation resistance                                           | > 5 MOhm                       |
| Wiring terminals                                             | With screw                       | Prolonged operation switch (no.of position changes)             | 40.000 at In 250 V ac cosφ=0.6 |
| Thermo-pressure with ball                                    | 125 °C                           | Glow Wire Test                                                  | 850 °C                         |
| Terminal grip on cable traction                              | > 50 N                           | Terminal tightening capacity stranded cables (mm <sup>2</sup> ) | min. 0.75 - max. 2x4           |
| Terminal tightening capacity solid cables (mm <sup>2</sup> ) | min. 0.5 - max. 2x2.5            | No. SYSTEM modules                                              | 1                              |
| Material                                                     | Technopolymer                    | Electrocod                                                      | 0130                           |

#### DIMENSIONAL

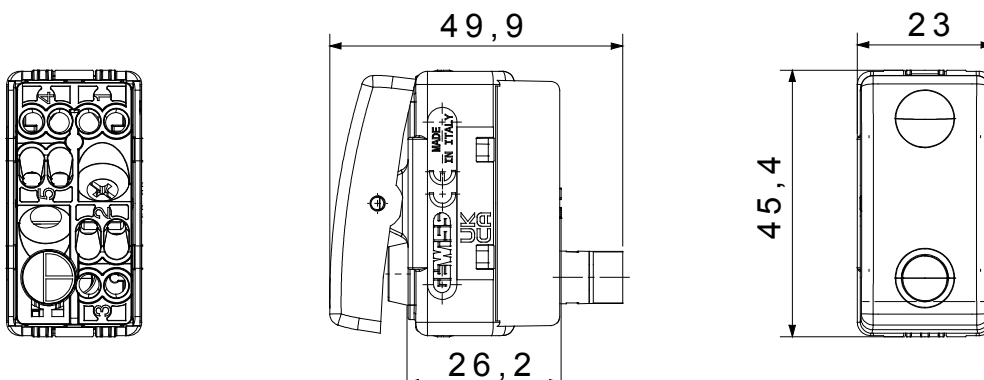

#### TECHNICAL SYMBOLOGY



#### STANDARDS/APPROVALS

