# Product Data Sheet

## GW21583


SYSTEM BLACK - Domestic range





The System modular devices allow the creation of infinite combinations of devices and plates, through a complete range that covers all design, functional and installation needs. Colours and finishes: satin black, elegant and classy. Ideal for flush-mounted solutions (for rectangular or square boxes), surface-mounted solutions and special applications. The range includes control units, socket-outlets, breakers, indicators, connectors and devices for the control, safety and comfort of your home

| | | | |
|---|---|---|---|
| Category | One-way switch | Button key | With replaceable neutral lens |
| Symbol | - | Colour | Black |
| Description | 1P - 16 AX illuminable | Voltage | 250 V ac |
| Signalling unit | - | Standard | EN 60669-1 |
| Resistance at test voltage | 2000 V at 50 Hz for 1 minute | Rated power of 230V LED lamps | 200 W |
| Insulation resistance | > 5 MOhm | Wiring terminals | With screw |
| Prolonged operation switch (no.of position changes) | 40.000 at In 250 V ac cosφ=0.6 | Thermo-pressure with ball | 125 °C |
| Glow Wire Test | 850 °C | Terminal grip on cable traction | > 50 N |
| Terminal tightening capacity stranded cables (mm²) | min. 0.75 - max. 2x4 | Terminal tightening capacity solid cables (mm²) | min. 0.5 - max. 2x2.5 |
| No. SYSTEM modules | 1 | Material | Technopolymer |
| Electrocod | 0130 | | |

## DIMENSIONAL



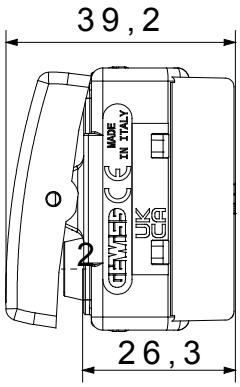


## TECHNICAL SYMBOLOGY




## STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 02/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice