



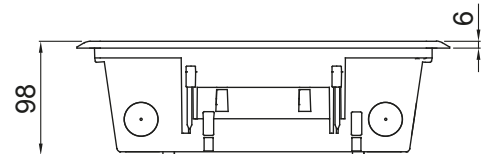

Wide range of surface-mounting and flush-mounting boxes for domestic ranges with high mechanical robustness and accessories supplied: dividers, junction elements, mortarguard shield, etc. Completing the range, the distribution outlet boxes for floor-mounting installations can be personalised in terms of capacity, external design finish, and internal fittings (they take both System range components and DIN rail devices).

Conformidad normativa	EN 60670-1, EN 60670-23, CEI 23-48	Temperatura de instalación	-5 ÷ +45 °C
Compatibilidad con serie civil	SYSTEM	Grado de protección borde torreta/suelo	IP52
Modularidad interna	10 módulos SYSTEM	Grado de protección tapa/interior torreta	IP40 (punto de salida de cables IP20)
N. soportes	2 soportes de 5 módulos System	Prueba del hilo incandescente	850 °C
Dim. exter. BxHxP (mm)	212x98x320	Resistencia a carga puntual (N)	500
Material	Tecnopolímero GW PLAST	Resistencia a carga distribuida (N)	1000
Halogen Free	Libre de halógenos según EN 60754-2		

DIMENSIONAL

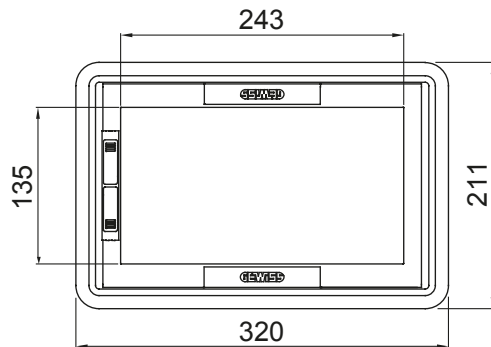

SIMBOLOGÍA TÉCNICA



850 °C

MARCAS/APROBACIONES

